

AV OVER IP · JPEG2000 4K60 1GBE ENCODER

BLU-JP1G-HC-ENC

JPEG2000 4K60 AVoIP 1GbE Encoder with KVM, eARC/ARC, HDMI & USB- C In

A 1U-style encoder built on JPEG2000 technology, with HDMI and USB-C dual inputs at up to 4K60 4:4:4, eARC/ARC/S-PDIF/analog audio return, USB 2.0/KVM, two-way IR, RS-232, relay/GPIO contact control, and PoE — extending signal up to 328ft/100m over CAT6/6A/7.



4K60 4:4:4

HDMI 2.0B / HDCP 2.2

18Gbps

VIDEO BANDWIDTH

328ft/100m

OVER CAT6/6A/7

eARC/ARC

+ S/PDIF, ANALOG RETURN

USB 2.0 / KVM

+ RELAY, GPIO, IR, POE

CONTENTS

01 Introduction

03 Package Contents

05 Operation Controls & Functions

07 IR Pin Definition

09 Web GUI Operation Guide

11 Switch Model

13 Application Example

02 Features

04 Specifications

06 Signal Switching Mode

08 Rack Mounting Instruction

10 MJPEG Substream Operation

12 4K over IP System Control

Bluknot is a registered trademark of Bronx Systems India Private Limited. · www.bronx.co.in · sales@bronx.co.in

01 Introduction

What the BLU-JP1G-HC-ENC does.

The product is based on JPEG2000 technology. It adopts ASPEED AST1530 for image codec and low delay KVM applications. Encoder features HDMI and USB-C dual inputs, with a video resolution of up to 4K60 4:4:4. It supports audio embedding and de-embedding function, ARC/eARC/S/PDIF/analog audio return function, as well as USB 2.0/KVM/Camera, 1G Ethernet, bi-directional RS-232, two-way IR and PoE function. Guest mode controls of RS-232, IR, CEC are supported. Built-in two channel RELAY ports and two channel I/O ports for contact control. Dante AV-A mode is supported if the product is license activated.

The USB-C IN 1 port supports video/audio/USB data transmission and power charging to USB-C source device by USB-C adapter connected to the USB-C IN 2 port.

Built-in MJPEG Substream which supports plenty API commands to achieve flexible configurations is useful for 3rd party control Apps to preview video content.

The system is based on Linux for software development, provides flexible control methods, and can realize intelligent networking based on Gigabit Ethernet Switch.

02 Features

- HDCP 2.2 compliant
- Support 18Gbps video bandwidth
- Input and output video resolution is up to 4K60 4:4:4, as specified in HDMI 2.0b
- Signal transmission distance can be extended up to 328ft / 100m via CAT6/6A/7 cable
- With HDMI and USB-C dual inputs, supporting auto switching (switch to the corresponding signal input channel automatically when the signal source is connected and detected)
- The USB-C IN 1 port supports video/audio/USB data transmission and power charging to USB-C source device by USB-C adapter (up to PD 100W) connected to the USB-C IN 2 port
- Transmit video, analog/digital audio, IR, RS-232, CEC and USB 2.0 signal over Ethernet
- ARC/eARC/S/PDIF/analog audio return transmission (Note: the analog audio return transmission is available only in the point to point connection mode)
- Optional built-in Dante AV-A
- Audio embedding and de-embedding are supported
- Channel configuration via front panel buttons and LED screen
- Built-in two channel RELAY ports and two channel I/O ports for contact control
- Support unicast and multicast functions
- Support point-to-point, video matrix and video wall functions (video wall supports up to 9x9)
- Intelligent video wall class management
- Built-in MJPEG Substream for video real-time preview on portable devices
- 1G managed network Switch
- Standard PoE (802.3at PD device) or local 12V power supply
- Support HDR10, Dolby Vision, HLG bypass
- Audio formats: LPCM 2.0/5.1/7.1CH, Dolby Digital/Plus/EX, Dolby True HD, Dolby Atmos, DTS, DTS-96/24, DTS-EX DSD, DTS High Res, DTS-HD Master, DTS:X
- Flexible control via front panel buttons, IR, RS-232, TCP/IP and Web GUI
- Smart networking design for easy and flexible installation

03 Package Contents

1	1x BLU-JP1G-HC-ENC JPEG2000 4K60 AV over IP 1GbE Encoder
2	1x IR Receiver cable (1.5 meters)
3	1x IR Blaster cable (1.5 meters)
4	3x 3pin-3.81mm Phoenix Connector (male)

5	2x 4pin-3.81mm Phoenix Connector (male)
6	1x 12V/2.5A Locking Power Supply
7	2x Mounting Ear
8	4x Machine Screw (KM3*4)
9	1x User Manual

04 Specifications

Technical, connection, TX analog audio, Dante audio, power and mechanical figures.

TECHNICAL	
HDCP Compliant	HDCP 2.2
Video Bandwidth	18Gbps
Input Video Resolution	Color Space: RGB, YCbCr 4:4:4 / 4:2:2 / 4:2:0 Color Depth: 8/10/12-bit
HDMI Audio Formats	LPCM 2.0/5.1/7.1CH, Dolby Digital/Plus/EX, Dolby True HD, Dolby Atmos, DTS, DTS-96/24, DTS-EX DSD, DTS High Res, DTS-HD Master, DTS:X
HDMI Compliant	HDMI 2.0b
Video Compression Standard	JPEG2000
Video Network Bandwidth	1G
Video Resolution	480i ~ 1080p50/60Hz, 4Kx2K@24/30Hz, 4K2K@50Hz/60Hz 4:4:4
Transmission Distance	131ft/100m CAT6/6A/7
HDR	Both input and output support HDR
Audio Sample Rate	32~192kHz
USB Bandwidth	USB 2.0 480Mbps
Output Video Resolution	Auto, 3840x2160p60, 3840x2160p50, 4096x2160p60, 4096x2160p50, 3840x2160p30, 3840x2160p25, 1920x1200p60, 1920x1080p60, 1920x1080p50, 1360x768p60, 1280x800p60, 1280x720p60, 1280x720p50, 1024x768p60
ESD Protection	IEC 61000-4-2: ±15kV (Air-gap discharge) & ±8kV (Contact discharge)
IR Level	Default 12V, optional 5V (set through front panel buttons, API commands, upper computer, or controller)
IR Frequency	Wideband 20K - 60KHz

TX ANALOG AUDIO	
Frequency Response	(±0.146dB) 20Hz ~ 20kHz
Audio S/N Ratio	96dB@0dB,1kHz A-weighted
Line Input Level (Maximum)	0dB(1Vrms) @ unbalanced audio
Output Impedance	33 ohms
Audio Output Sync Delay	0 to 50ms
Audio THD+N	0.014%@0dBV,1kHz
Line Output Level (Maximum)	0.9Vrms @ unbalanced audio
Input Impedance	10K ohms

CONNECTION	
Encoder – Input	1x HDMI IN [HDMI Type A, 19-pin female] 1x L/R AUDIO IN [3-pin 3.81mm Phoenix connector] 1x USB-C Video [USB Type C, 24-pin female] 1x USB-C Charging [USB Type C, 24-pin female]
Encoder – Output	1x HDMI OUT [HDMI Type A, 19-pin female] 1x L/R AUDIO OUT [3-pin 3.81mm Phoenix connector] 1x S/PDIF OUT [Optical audio connector]
Encoder – Control	1x RS-232 [3-pin 3.81mm Phoenix connector] 1x LAN(PoE) [RJ45 jack, supporting PoE] 1x USB 2.0 HOST [USB Type B, 4-pin female] 2x USB 2.0 DEVICE [USB Type-A, 4pin female] 2x RELAYS [3.81mm Phoenix connector] 2x DIGITAL IO [3.81mm Phoenix connector] 1x IR IN [3.5mm audio jack, 5V/12V IR] 1x IR OUT [3.5mm audio jack, 5V/12V IR]
Decoder (optional) – Input	1x S/PDIF IN [Optical audio connector] 1x L/R AUDIO IN [3-pin 3.81mm Phoenix connector]
Decoder (optional) – Output	1x HDMI OUT [Type A, 19-pin female] 1x L/R AUDIO OUT [3-pin 3.81mm Phoenix connector]
Decoder (optional) – Control	1x RS-232 [3.81mm Phoenix connector] 1x LAN (POE) [RJ45 jack] 1x FIBER [Optical fiber slot] 2x USB 1.1 DEVICE [Type-A, 4-pin female] 2x USB 2.0 DEVICE [Type-A, 4-pin female] 2x RELAYS [3.81mm Phoenix connector] 2x DIGITAL IO [3.81mm Phoenix connector] 1x IR IN [3.5mm audio Jack, 5V/12V IR] 1x IR OUT [3.5mm audio Jack, 5V/12V IR]

DANTE AUDIO	
Sample Rate	44.1, 48, 88.2, 96kHz
Dante Audio Channels	Maximum 2x2 (input x output)
Dante Audio PCM Sample Format	Signed 32-bit little endian
Audio Format	LPCM only

POWER & MECHANICAL	
Power Supply	Input: AC100-240V 50/60Hz · Output: DC 12V/2.5A (US/EU standards, CE/FCC/UL certified)
Power Consumption	Encoder: 12W (Max.) · Decoder: 7.8W (Max.)
Operating Temperature	32°F - 104°F / 0°C - 40°C
Storage Temperature	-4°F - 140°F / -20°C - 60°C
Operating Humidity	10% - 90% (relative humidity, no condensing)

Storage Humidity	20% - 80% (relative humidity, no condensing)
Weight	Encoder: 632g · Decoder: 626g
Dimensions	Encoder/Decoder: 204mm [W] x 136mm [D] x 25.5mm [H]
Housing	Metal enclosure
Color	Black


RECOMMENDED HDMI CABLE LENGTH

	4K60	4K30	1080P60
HDMI IN / OUT	16ft / 5M	32ft / 10M	50ft / 15M

The use of a “Premium High Speed HDMI” cable is highly recommended.

05 Operation Controls & Functions

5.1 Encoder Panel

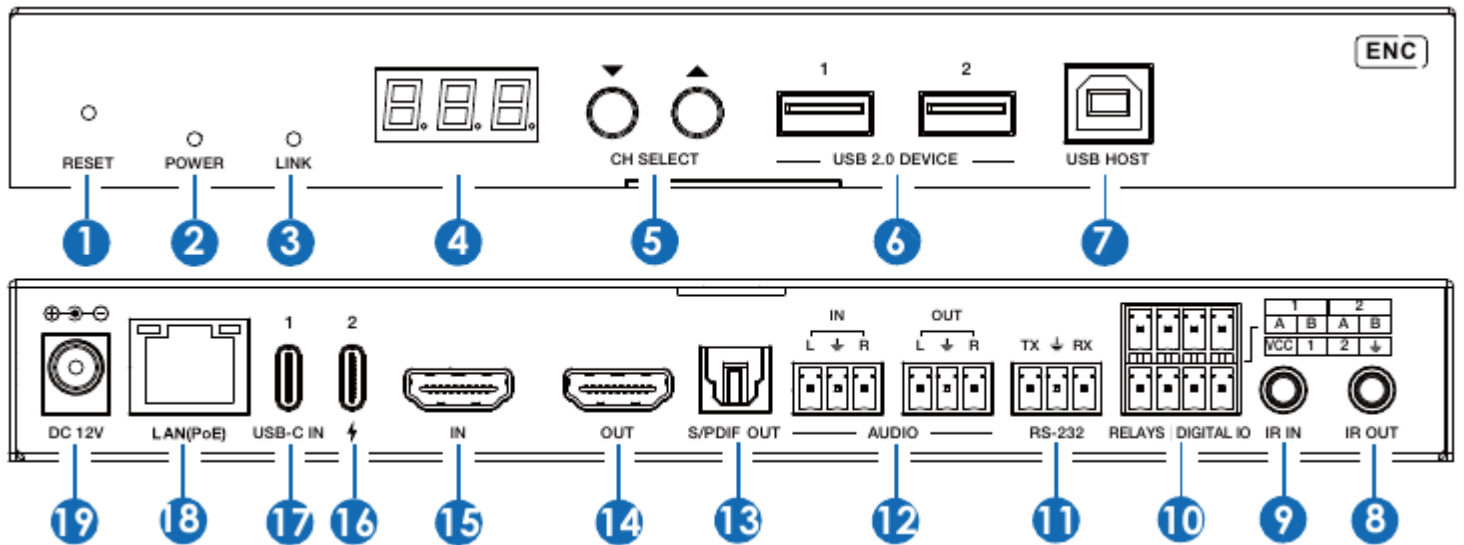

1	RESET	During device operation, press and hold the RESET button for 5 seconds. When the POWER LED and LINK LED flash simultaneously and the LED screen displays 3 dots, it indicates that the device is resetting. Then you can release the RESET button. The device is in unicast mode after the reset.
2	POWER LED (Red)	- Light on: The system is powered on (with PoE or DC power supply). - Light off: The system is powered off (without PoE or DC power supply).
3	LINK LED (Green)	Connection status LED. - Light on: Encoder and Decoder are connected through the LAN(PoE) port, and there is video signal transmitted to the Decoder. - Light flashes: Encoder and Decoder are connected through the LAN(PoE) port, but there is no video signal transmitted to the Decoder. - Light off: Encoder and Decoder are not connected through the LAN(PoE) port.
4	LED screen	Shows Encoder ID as default. Displays the corresponding options of configuration functions during setting Encoder configurations.
5	CH SELECT	UP and DOWN buttons, used to set Encoder ID and other settings.
6	USB 2.0 DEVICE	Connect to USB 2.0 devices.
7	USB HOST	USB Host port, connected to a PC.
8	IR OUT	IR signal output port. The IR level can be set to 5V or 12V (default) through the panel buttons.
9	IR IN	IR signal input port. The IR level can be set to 5V or 12V (default) through the panel buttons.
10	RELAYS / DIGITAL IO	VCC: Power output (12V or 5V configurable), maximum to 12V@50mA, 5V@100mA loading. The default output is 12V. RELAYS: 2 channel low-voltage relay ports, each group is independent and isolated, maximum to 1A 30VDC loading. Contacts are disconnected by default. DIGITAL IO: 2 channel GPIO ports, for digital level signal output control or input detection (up to 12V level detection). The output control mode (default mode, low level as default output) or input detection mode is configurable. The DIGITAL IO internal pull-up voltage follows the VCC. Output control mode: (a) The maximum withstand sink current is 50mA when outputting low level. (b) When VCC is 5V and high level is output, the maximum current driving capacity is 2mA. (c) When VCC is 12V and high level is output, the maximum current driving capacity is 5mA. Input detection mode: (a) When VCC is 5V, DIGITAL IO is pulled up to 5V internally through a 2.2K ohm resistor. (b) When VCC is 12V, DIGITAL IO is pulled up to 12V internally through a 2.2K ohm resistor.
11	RS-232	RS-232 serial port, supporting RS-232 command pass-through and local serial port control. The default baud rate is 115200.
12	AUDIO IN/OUT	AUDIO IN: Analog audio input port, the audio can be embedded into the HDMI signal for pass-through over to HDMI output and audio out on Decoder, or be loopout by the AUDIO OUT port on Encoder. AUDIO OUT: Analog audio output port. It can output the audio extracted from the HDMI IN port (in case of LPCM). Also it can output the audio transmitted from the AUDIO IN port of the Decoder in unicast mode (point-to-point direct connection).
13	S/PDIF OUT	S/PDIF signal output port. It can output the ARC or S/PDIF audio returned from the Decoder when both the Encoder and Decoder are correspondingly set to the ARC or S/PDIF audio return mode (Set through the Controller Box or API commands in Multicast mode; Set through the front panel buttons in unicast mode).

14	HDMI OUT	HDMI local loop output port, connected to an HDMI display device such as TV or monitor.
15	HDMI IN	HDMI signal input port, connected to an HDMI source device such as Blu-ray Player or Set-top box with an HDMI cable.
16	USB-C IN 1	USB Type C port, supporting 4K60 audio/video and USB 2.0 signals transmission, and charging the external device (The USB-C IN 2 port must be connected to the power supply).
17	USB-C IN 2	USB-C power input port, only supporting USB Type C PD power input up to 100W. Connect this port to the UCB-C power adapter to charge the device connected to the USB-C IN 1 port.
18	LAN(PoE)	1G LAN port, supporting PoE function, with Auto IP mode by default, and the default IP address is 169.254.x.x. Connect to the network Switch to form a distributed system. Yellow LED: Light flash when there is data transmission, and light off when there is no data transmission. Green LED: Light on when the network is linked normally, and light off when the network is not linked. Note: When the network Switch delivers PoE power supply, DC 12V adapter doesn't need to apply on the unit.
19	DC 12V	The device can be powered via two methods: • Local DC 12V/2.5A power supply (with priority) • PoE from Network Switch. Device acts as PD mode. When the Switch supports PoE function, DC power supply is not needed.

Operation description of the LED screen and CH SELECT buttons (for Encoder):

1. **ENC ID:** After the system is powered on, the Encoder's LED screen will show the ENC ID (000 by default if not set).
2. **IP address:** Press and hold the UP button for 5 seconds, the Encoder's LED screen will show in sequence “IPx”, “xxx”, “xxx”, “xxx”, “xxx”, which are the IP mode and IP address of Encoder.
3. **Configuration mode:** Press and hold UP + DOWN buttons at the same time for 5 seconds, then release to enter the configuration mode with “CFN” displaying on the LED screen.
4. **Device ID settings:** After entering the configuration mode, press the UP/DOWN button to enter the first page with the current ID number (e.g. 001) displaying on the LED screen (000 by default). Press and hold UP + DOWN buttons for 5 seconds, then release to enter the ID settings mode, in which the ID number on the LED screen will flash at 1Hz, then press the UP/DOWN button to select the device ID you desired (ID range: 000~762), then press and hold UP + DOWN buttons for 5 seconds to confirm the setting and stop flashing. After setting, the unit will reboot automatically. *Note: The device ID can not be modified in Controller Box mode.*
5. **EDID settings:** After entering the configuration mode, press the UP/DOWN button to enter the second page with “E00” (in which “E” refers to EDID, “00” to EDID ID) or “COP” (which indicates copy EDID) displaying on the LED screen (E15 by default). Press and hold UP + DOWN buttons for 5 seconds, then release to enter the EDID settings mode, in which the EDID ID number on the LED screen will flash at 1Hz, then press the UP/DOWN button to select the EDID ID you desired, then press and hold UP + DOWN buttons for 5 seconds to confirm the setting and stop flashing. The corresponding EDID ID list follows below.

EDID SETTING LIST			
EDID ID	EDID DESCRIPTION	EDID ID	EDID DESCRIPTION
E00	1080P_Stereo_Audio_2.0_SDR	E12	4K2K60_420_Stereo_Audio_2.0_SDR
E01	1080P_DolbyDTS_5.1_SDR	E13	4K2K60_420_DolbyDTS_5.1_SDR
E02	1080P_HD_Audio_7.1_SDR	E14	4K2K60_420_HD_Audio_7.1_SDR
E03	1080I_Stereo_Audio_2.0_SDR	E15	4K2K60_444_Stereo_Audio_2.0_SDR
E04	1080I_HD_Audio_7.1_SDR	E16	4K2K60_444_HD_Audio_7.1_SDR
E05	1080I_DolbyDTS_5.1_SDR	E17	4K2K60_444_DolbyDTS_5.1_SDR
E06	3D_Stereo_Audio_2.0_SDR	E18	4K2K60_444_Stereo_Audio_2.0_HDR_10-bit
E07	3D_DolbyDTS_5.1_SDR	E19	4K2K60_444_DolbyDTS_5.1_HDR_10-bit
E08	3D_HD_Audio_7.1_SDR	E20	4K2K60_444_HD_Audio_7.1_HDR_10-bit
E09	4K2K30_444_Stereo_Audio_2.0_SDR	E21	DVI_1280x1024
E10	4K2K30_444_DolbyDTS_5.1_SDR	E22	DVI_1920x1080
E11	4K2K30_444_HD_Audio_7.1_SDR	E23	DVI_1920x1200


Note: In point to point connection mode, before using the EDID copy function, all codecs need to be set to CA1 unicast mode, and after setting, the HDMI cable of the Decoder needs to be re-plugged to report the EDID of TV to the Encoder.

6. **IR mode settings:** After entering the configuration mode, press the UP/DOWN button to enter the third page with “IR2” (in which “IR” refers to IR, and “2” to 12V) displaying on the LED screen (IR2 by default). Press and hold UP + DOWN buttons for 5 seconds, then release to enter the settings mode, in which the IR mode (IR1 or IR2) on the LED screen will flash at 1Hz, then press the UP/DOWN button to select the IR mode, then press and hold UP + DOWN buttons for 5 seconds to confirm the setting and stop flashing.
The corresponding IR mode options are: **IR1** — 5V IR wire; **IR2** — 12V IR wire.
7. **Audio embedding mode settings:** After entering the configuration mode, press the UP/DOWN button to enter the fourth page with “HDI/ANA” displaying on the LED screen (HDI by default). Press and hold UP + DOWN buttons for 5 seconds, then release to enter the settings mode, in which the audio return mode (HDI/ANA) on the LED screen will flash at 1Hz, then press the UP/DOWN button to select the mode, then press and hold UP + DOWN buttons for 5 seconds to confirm the setting and stop flashing.
The corresponding audio embedding mode options are: **HDI** — HDMI audio embedding; **ANA** — Analog audio embedding.
8. **IP mode settings:** After entering the configuration mode, press the UP/DOWN button to enter the fifth page with “IP1/IP2/IP3” displaying on the LED screen (IP3 by default). Press and hold UP + DOWN buttons for 5 seconds, then release to enter the settings mode, in which the IP mode on the LED screen will flash at 1Hz, then press the UP/DOWN button to select the mode, then press and hold UP + DOWN buttons for 5 seconds to confirm the setting and stop flashing. After setting, the unit will reboot automatically.
The corresponding IP mode options are: **IP1** — Static IP mode (Default IP address: 169.254.100.254); **IP2** — DHCP IP mode; **IP3** — Auto IP mode (Default assigned network segment: 169.254.xxx.xxx). *Note: The IP mode can not be modified in Controller Box mode.*
9. **Multicast mode settings:** After entering the configuration mode, press the UP/DOWN button to enter the sixth page with “CA1/CA2” displaying on the LED screen (CA1 by default). Press and hold UP + DOWN buttons for 5 seconds, then release to enter the settings mode, in which the multicast mode on the LED screen will flash at 1Hz, then press the UP/DOWN button to select the mode, then press and hold UP + DOWN buttons for 5 seconds to confirm the setting and stop flashing. After setting, the unit will reboot automatically.
The corresponding multicast mode options are: **CA1** — Unicast mode; **CA2** — Multicast mode.
10. **Audio return mode settings:** After entering the configuration mode, press the UP/DOWN button to enter the seventh page with “C2C/A2A” displaying on the LED screen (C2C by default). Press and hold UP + DOWN buttons for 5 seconds, then release to enter the settings mode, in which the audio return mode on the LED screen will flash at 1Hz, then press the UP/DOWN button to select the mode, then press and hold UP + DOWN buttons for 5 seconds to confirm the setting and stop flashing. After setting, the unit will reboot automatically.
The corresponding audio return mode options are: **C2C** — the eARC/ARC or S/PDIF audio from the Decoder is transmitted back to the HDMI IN or SPDIF OUT port of the Encoder; **A2A** — the analog audio embedded in the Decoder is transmitted back to the AUDIO OUT analog audio port of the Encoder.

Notes: (1) The audio return mode can not be modified through front panel buttons in Controller Box or Multicast mode. (2) Only when both the Encoder and Decoder are correspondingly set to C2C/A2A audio return mode in unicast mode, the audio return can be realized. (3) The A2A audio return mode is available only in unicast mode. (4) When using ARC, ARC audio amplifier on Encoder HDMI IN port and ARC TV on Decoder HDMI OUT port should be used. When using eARC, eARC audio amplifier on Encoder HDMI IN port and eARC TV on Decoder HDMI OUT port should be used. (5) After entering various setting modes, you can hold down the DOWN button to exit the current interface quickly, or if you do not perform any operation within 5 seconds, it will automatically return to the previous interface.

5.2 Decoder Panel

The optional decoder can work with any decoder of the same bluKnot JPEG2000 AV-over-IP series.

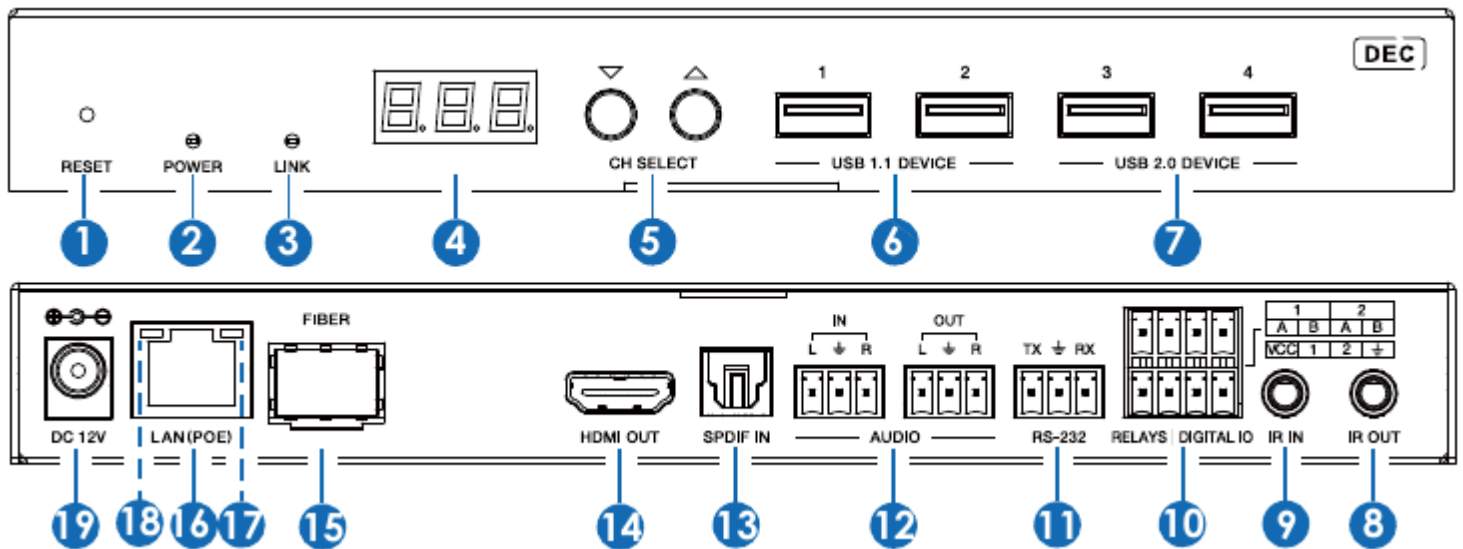

1	RESET	During device operation, press and hold the RESET button for 5 seconds. When the POWER LED and LINK LED flash simultaneously and the LED screen displays 3 dots, it indicates that the device is resetting. Then you can release the RESET button. The device is in unicast mode after the reset.
2	POWER LED (Red)	- Light on: The system is powered on (with PoE or DC power supply). - Light off: The system is powered off (without PoE or DC power supply).
3	LINK LED (Green)	Connection status LED. - Light on: Encoder and Decoder are connected through the LAN(PoE) port, and there is video signal transmitted from the Encoder. - Light flashes: Encoder and Decoder are connected through the LAN(PoE) port, but there is no video signal transmitted from the Encoder. - Light off: Encoder and Decoder are not connected through the LAN(PoE) port.
4	LED screen	Shows the selected Encoder ID as default. Displays the corresponding options of configuration functions during setting Decoder configurations.
5	CH SELECT	UP and DOWN buttons, used to set Decoder ID and other settings.
6	USB 1.1 DEVICE	Connect to USB 1.1 devices, such as Keyboard or Mouse.
7	USB 2.0 DEVICE	Connect to USB 2.0 devices, such as USB flash disk or USB Camera.
8	IR OUT	IR signal output port. The IR level can be set to 5V or 12V (default) through the panel buttons.
9	IR IN	IR signal input port. The IR level can be set to 5V or 12V (default) through the panel buttons.
10	RELAYS / DIGITAL IO	VCC: Power output (12V or 5V configurable), maximum to 12V@50mA, 5V@100mA loading. The default output is 12V. RELAYS: 2 channel low-voltage relay ports, each group is independent and isolated, maximum to 1A 30VDC loading. Contacts are disconnected by default. DIGITAL IO: 2 channel GPIO ports, for digital level signal output control or input detection (up to 12V level detection). The output control mode (default mode, low level as default output) or input detection mode is configurable. The DIGITAL IO internal pull-up voltage follows the VCC. Output control mode: (a) The maximum withstand sink current is 50mA when outputting low level. (b) When VCC is 5V and high level is output, the maximum current driving capacity is 2mA. (c) When VCC is 12V and high level is output, the maximum current driving capacity is 5mA. Input detection mode: (a) When VCC is 5V, DIGITAL IO is pulled up to 5V internally through a 2.2K ohm resistor. (b) When VCC is 12V, DIGITAL IO is pulled up to 12V internally through a 2.2K ohm resistor.
11	RS-232	RS-232 serial port, supporting RS-232 command pass-through and local serial port control. The default baud rate is 115200.
12	AUDIO IN/OUT	AUDIO IN: Analog audio input port, the audio can be transmitted to Encoder AUDIO OUT in unicast mode (point-to-point direct connection). AUDIO OUT: Analog audio output port. It outputs the same audio of that on HDMI OUT in case audio format is LPCM.
13	SPDIF IN	S/PDIF signal input port.
14	HDMI OUT	HDMI signal output port, connected to an HDMI display device such as TV or monitor.

15	Data Signal Indicator lamp (Yellow)	• Light flashing: There is data transmission. • Light off: There is no data transmission.
16	LAN (POE)	1G LAN port, supporting PoE function, with Auto IP mode by default, and the default IP address is 169.254.x.x. Connect to the network Switch to form a distributed system. Note: When network switch delivers PoE power supply, DC 12V adapter doesn't need to apply on the unit.
17	FIBER	Connect with optical fiber module, and receive signals from the Encoder with an optical fiber cable directly or through a Switch.
18	Link Signal Indicator lamp (Green)	• Light on: The network cable is connected normally. • Light off: The network cable is not connected well.
19	DC 12V	The device can be powered via two methods: • Local DC 12V/2.5A power supply • PoE from Network Switch. Device acts as PD mode. When the Switch supports PoE function, DC power supply is not needed.

Operation description of the LED screen and CH SELECT buttons (for Decoder):

1. **ENC connection:** After the system is powered on, the Decoder's LED screen will show 000 by default if not set. Directly press the UP/DOWN button to select the channel ID of the connected Encoder (ID range: 000~762) to complete connection.
2. **IP address:** Press and hold the UP button for 5 seconds, the Decoder's LED screen will show in sequence “IPx”, “xxx”, “xxx”, “xxx”, “xxx”, which are the IP mode and IP address of Decoder.
3. **Configuration mode:** Press and hold UP + DOWN buttons at the same time for 5 seconds, then release to enter the configuration mode with “CFN” displaying on the LED screen.
4. **Device ID settings:** Same as Encoder — press UP/DOWN to the first page (current ID, 000 default), hold UP+DOWN 5s to enter settings, UP/DOWN to select ID (range 000~762), hold UP+DOWN 5s to confirm; unit reboots automatically. *Note: not modifiable in Controller Box mode.*
5. **Output scaling settings:** After entering the configuration mode, press the UP/DOWN button to enter the second page with “S00” (in which “S” refers to Scaling, and “00” to resolution ID) displaying on the LED screen (S00 by default). Press and hold UP + DOWN buttons for 5 seconds, then release to enter the settings mode, in which Sxx on the LED screen will flash at 1Hz, then press the UP/DOWN button to select the resolution ID you desired, then press and hold UP + DOWN buttons for 5 seconds to confirm the setting and stop flashing. The scaling settings are listed below.

SCALING SETTINGS			
SXX	RESOLUTION	SXX	RESOLUTION
S00	bypass	S07	2160P50
S01	1080P50	S08	2160P60
S02	1080P60	S09	1280x1024
S03	720P50	S10	1360x768
S04	2160P24	S11	1680x1050
S05	720P60	S12	1440x900
S06	2160P30	S13	1920x1200


6. **IR mode settings:** Press UP/DOWN to the third page with “IR2” displaying (default). Hold UP+DOWN 5s to enter settings, UP/DOWN to select IR mode, hold UP+DOWN 5s to confirm.
IR1 — 5V IR wire; **IR2** — 12V IR wire.
7. **eARC/ARC or S/PDIF audio return settings:** Press UP/DOWN to the fourth page with “ARC/SPD” displaying (ARC by default). Hold UP+DOWN 5s to enter the audio return settings mode, UP/DOWN to select the mode, hold UP+DOWN 5s to confirm.
ARC — eARC/ARC audio return (the audio from the HDMI OUT port of Decoder is transmitted back to the HDMI IN port of the Encoder); **SPD** — S/PDIF audio return (the audio from the S/PDIF IN port of Decoder is transmitted back to the S/PDIF OUT port of the Encoder).
Notes: (1) The audio return mode can not be modified through front panel buttons in Controller Box or Multicast mode. (2) Only when both the Encoder and Decoder are set to C2C audio return mode, the eARC/ARC or S/PDIF audio return can be realized. (3) When using ARC, ARC audio amplifier on Encoder HDMI IN port and ARC TV on Decoder HDMI OUT port should be used. When using eARC, eARC audio amplifier on Encoder HDMI IN port and eARC TV on Decoder HDMI OUT port should be used.
8. **IP mode settings:** Press UP/DOWN to the fifth page with “IP1/IP2/IP3” displaying (IP3 default). Hold UP+DOWN 5s to enter settings, UP/DOWN to select mode, hold UP+DOWN 5s to confirm; unit reboots automatically.
IP1 — Static IP mode (Default IP address: 169.254.100.253); **IP2** — DHCP IP mode; **IP3** — Auto IP mode (Default assigned network segment: 169.254.xxx.xxx). *Note: not modifiable in Controller Box mode.*
9. **Fiber/Copper mode settings:** Press UP/DOWN to the sixth page with “CPP/FIB” displaying (CPP default). Hold UP+DOWN 5s to enter settings, UP/DOWN to select mode, hold UP+DOWN 5s to confirm; unit reboots automatically.
CPP — Copper mode; **FIB** — Fiber mode.
10. **Multicast mode settings:** Press UP/DOWN to the sixth page with “CA1/CA2” displaying (CA1 default). Hold UP+DOWN 5s to enter settings, UP/DOWN to select mode, hold UP+DOWN 5s to confirm; unit reboots automatically.
CA1 — Unicast mode; **CA2** — Multicast mode.
11. **Audio return mode settings:** Press UP/DOWN to the seventh page with “C2C/A2A” displaying (C2C default). Hold UP+DOWN 5s to enter settings, UP/DOWN to select mode, hold UP+DOWN 5s to confirm; unit reboots automatically.
C2C — the eARC/ARC or S/PDIF audio from the Decoder is transmitted back to the HDMI IN or S/PDIF OUT port of the Encoder; **A2A** — the analog audio embedded in the Decoder is transmitted back to the AUDIO OUT analog audio port of the Encoder.

Notes: (1) The audio return mode can not be modified through front panel buttons in Controller Box or Multicast mode. (2) Only when both the Encoder and Decoder are correspondingly set to C2C/A2A audio return mode in unicast mode, the audio return can be realized. (3) The A2A audio return mode is available only in unicast mode. (4) When using ARC, ARC audio amplifier on Encoder HDMI IN port and ARC TV on Decoder HDMI OUT port should be used; when using eARC, eARC audio amplifier on Encoder HDMI IN port and eARC TV on Decoder HDMI OUT port should be used. (5) After entering various setting modes, you can hold down the DOWN button to exit the current interface quickly, or if you do not perform any operation within 5 seconds, it will automatically return to the previous interface.

06 Signal Switching Mode


Auto and manual switching between HDMI and USB-C inputs.

The HDMI/USB signal input of this product supports auto switching and manual switching modes, which can be set through API commands or the Web GUI configuration of the Controller, as shown in the figures below.

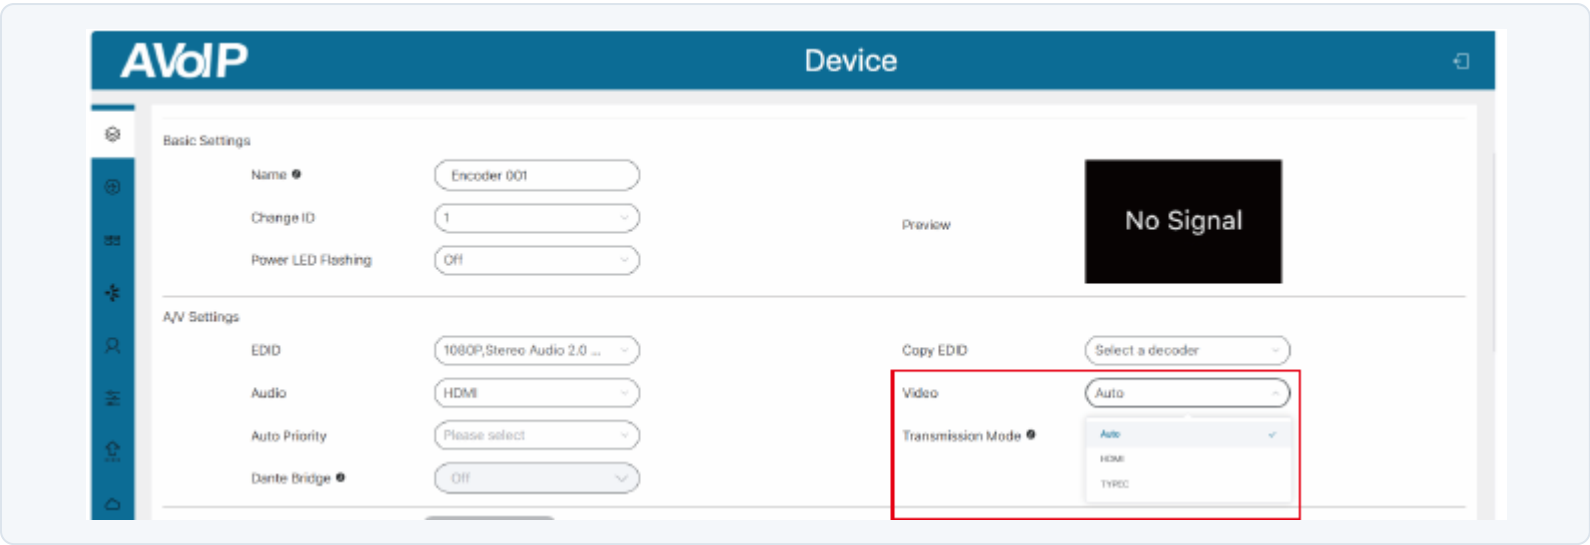

You can select Auto/HDMI/TYPEC for video signal switching (Auto by default).

- **Auto:** Automatically switch signal source through signal detection, and the later connected signal source has the priority.
- **HDMI:** Fixed use of HDMI signal source.
- **TYPEC:** Fixed use of USB-C signal source.

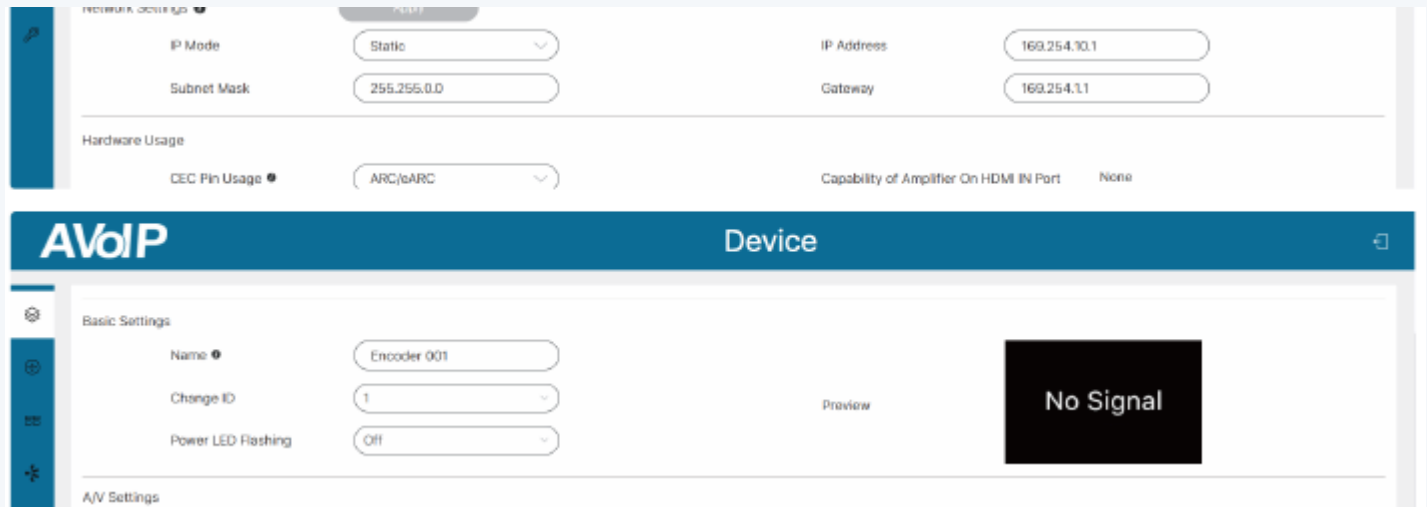

Then you can set the auto priority (None/HDMI/TYPEC), None by default.

- **None:** USB-C signal source has the priority by default, but it will switch to the HDMI signal source if the HDMI signal source is connected later.
- **HDMI:** HDMI signal source has the priority by default, and it will switch to the USB-C signal source only when the HDMI signal source is disconnected.
- **TYPESC:** USB-C signal source has the priority by default, and it will switch to the HDMI signal source only when the USB-C signal source is disconnected.

The LED screen on the front panel of this product can indicate the signal switching status in auto switching mode.

For HDMI signal input:


Active: Detect the HDMI 5V signal → LED screen flashes “HDI” for 3s → There is HDMI signal input → “HDI” remains on for 3s → Normal LED screen display
Connected: Detect the HDMI 5V signal → LED screen flashes “HDI” for 3s → There is no HDMI signal input → Normal LED screen display
Disconnected: No signal detected → Normal LED screen display

For USB-C signal input:

Active: Detect the USB-C 5V signal → LED screen flashes “USB” for 3s → There is USB-C signal input → “USB” remains on for 3s → Normal LED screen display
Connected: Detect the USB-C 5V signal → LED screen flashes “USB” for 3s → There is no USB-C signal input → Normal LED screen display
Disconnected: No signal detected → Normal LED screen display

07 IR Pin Definition

Wiring reference for the included IR blaster and receiver cables.

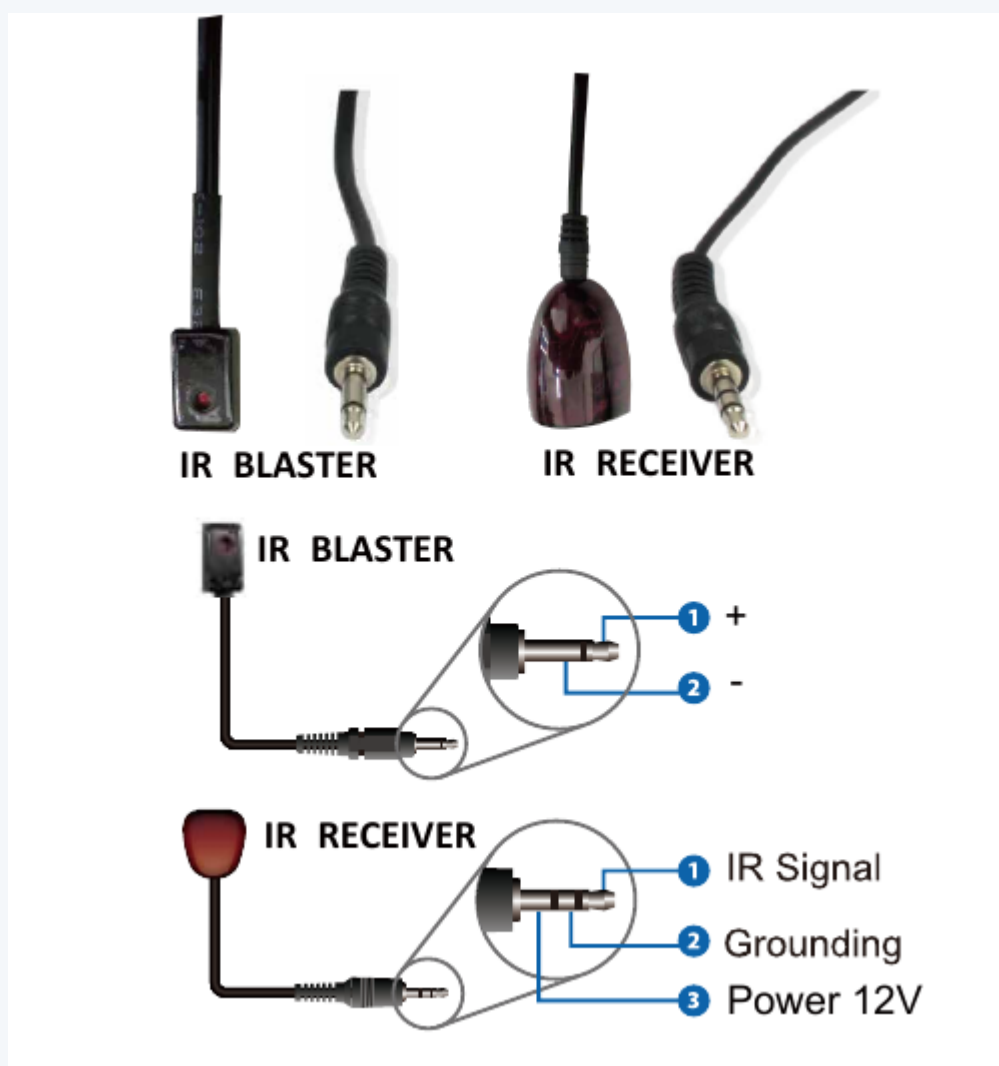

IR BLASTER — pin 1: + · pin 2: -


IR RECEIVER — pin 1: IR Signal · pin 2: Grounding · pin 3: Power 12V

08 Rack Mounting Instruction


8.1 6U V2 Rack Mounting

This product can be mounted in a standard 6U V2 rack (Please contact your supplier for 6U V2 rack sale). The mounting steps are as follows.


Step 1: Use included screws to fix two mounting ears on the product, as shown below.

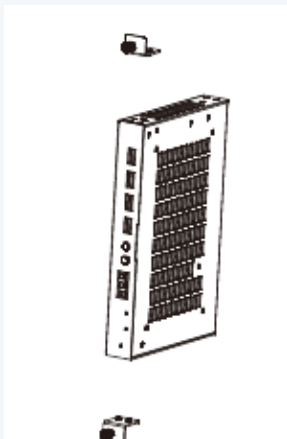

Step 2: Insert the product with mounting ears into a 6U V2 rack (6/8/10 units can be installed vertically), as shown below.

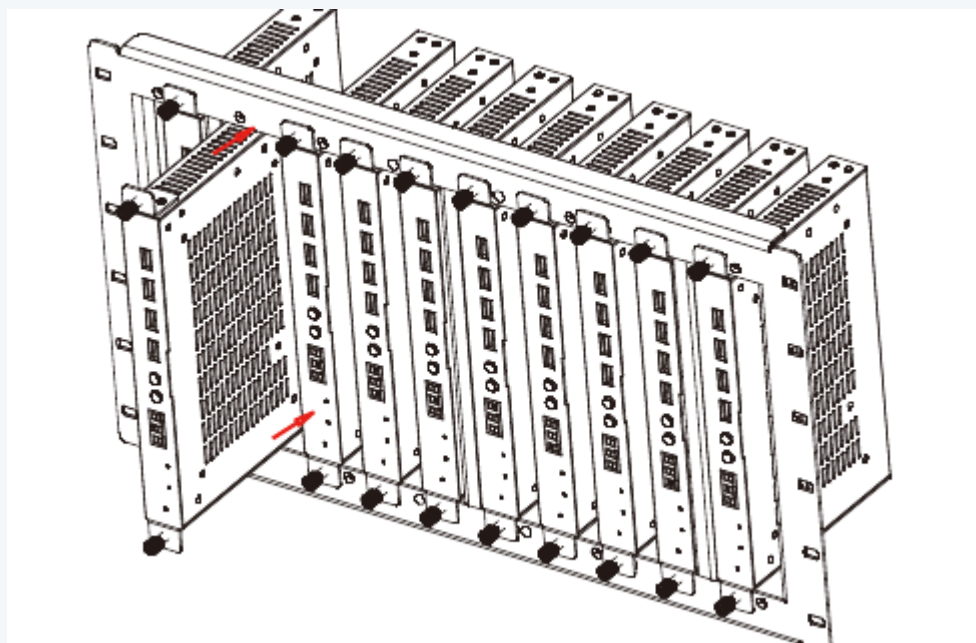


Step 3: Use screws to fix mounting ears on the rack to complete the mounting, as shown below.

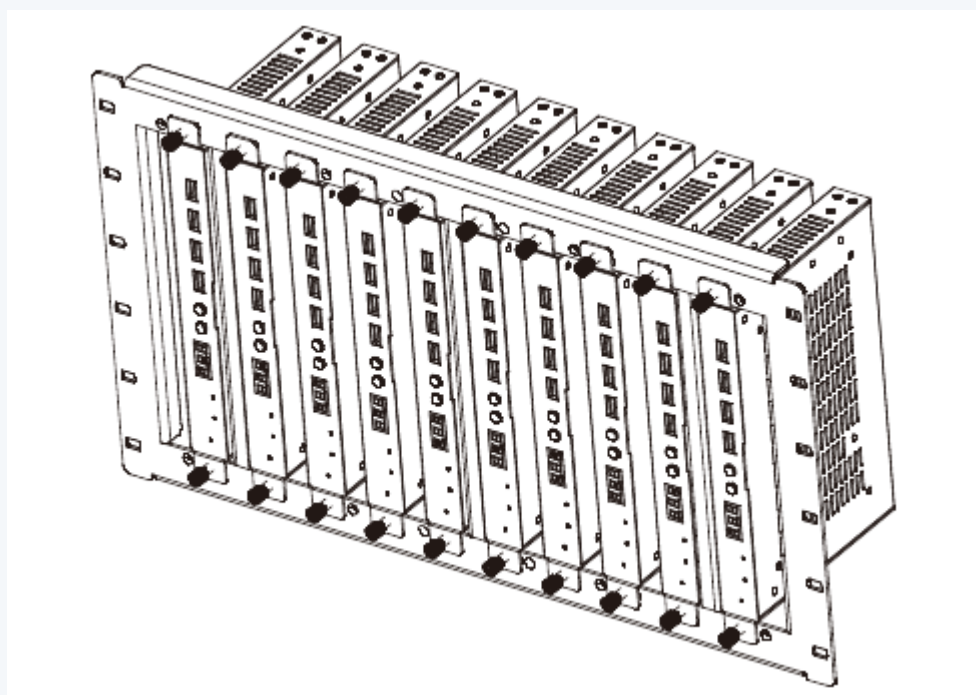


8.2 1U V2 Rack Mounting

This product also can be mounted in a standard 1U V2 rack (2 units can be installed horizontally). The mounting steps are as follows.

Step 1: Use included screws to fix two 1U V2 rack brackets on two products respectively, as shown below.

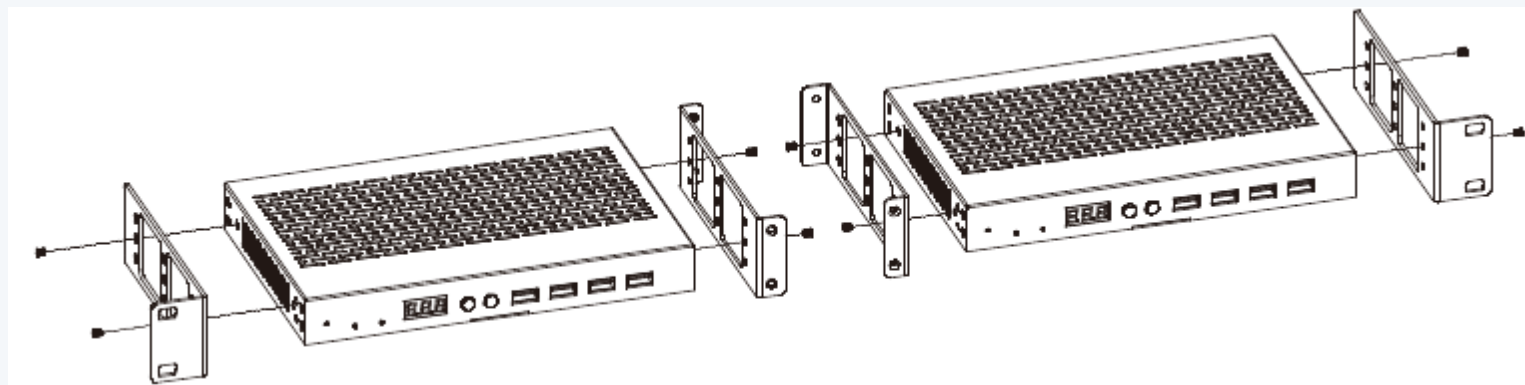


Step 2: Use screws to fix two 1U V2 rack brackets together, as shown below.

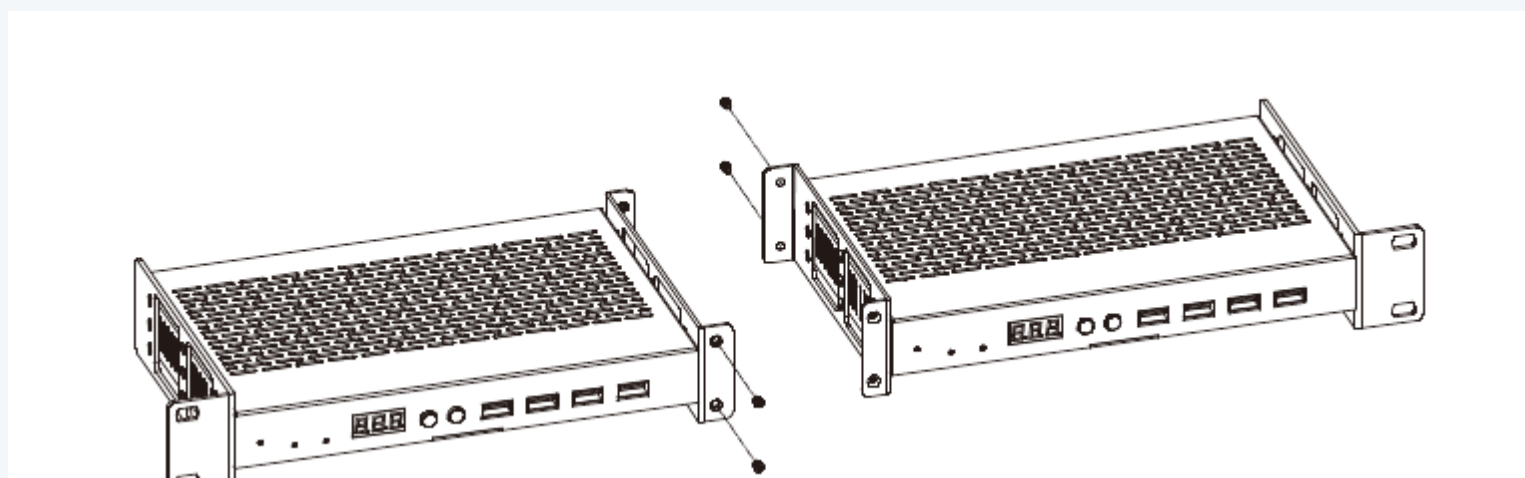

Step 3: Fasten screws between two 1U V2 rack brackets, so that two products are mounted in a 1U V2 rack, as shown below.

are mounted in a 1U V2 rack, as shown in the figure below:

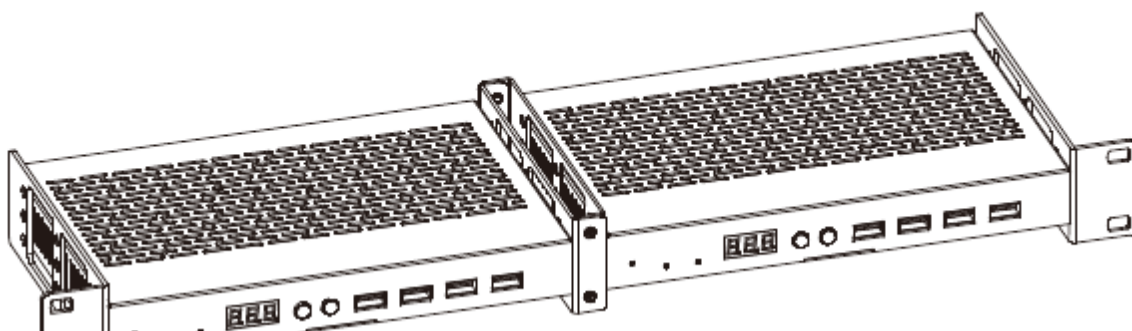


09 Web GUI Operation Guide

9.1 Preparation before Entering the System

The product can be controlled by the built-in Web GUI. The operation steps are as follows.

Step 1: Connect the Encoder, Decoder and PC to the same Switch, then connect an HDMI source device, HDMI display device and power supply. The connection diagram is shown below.

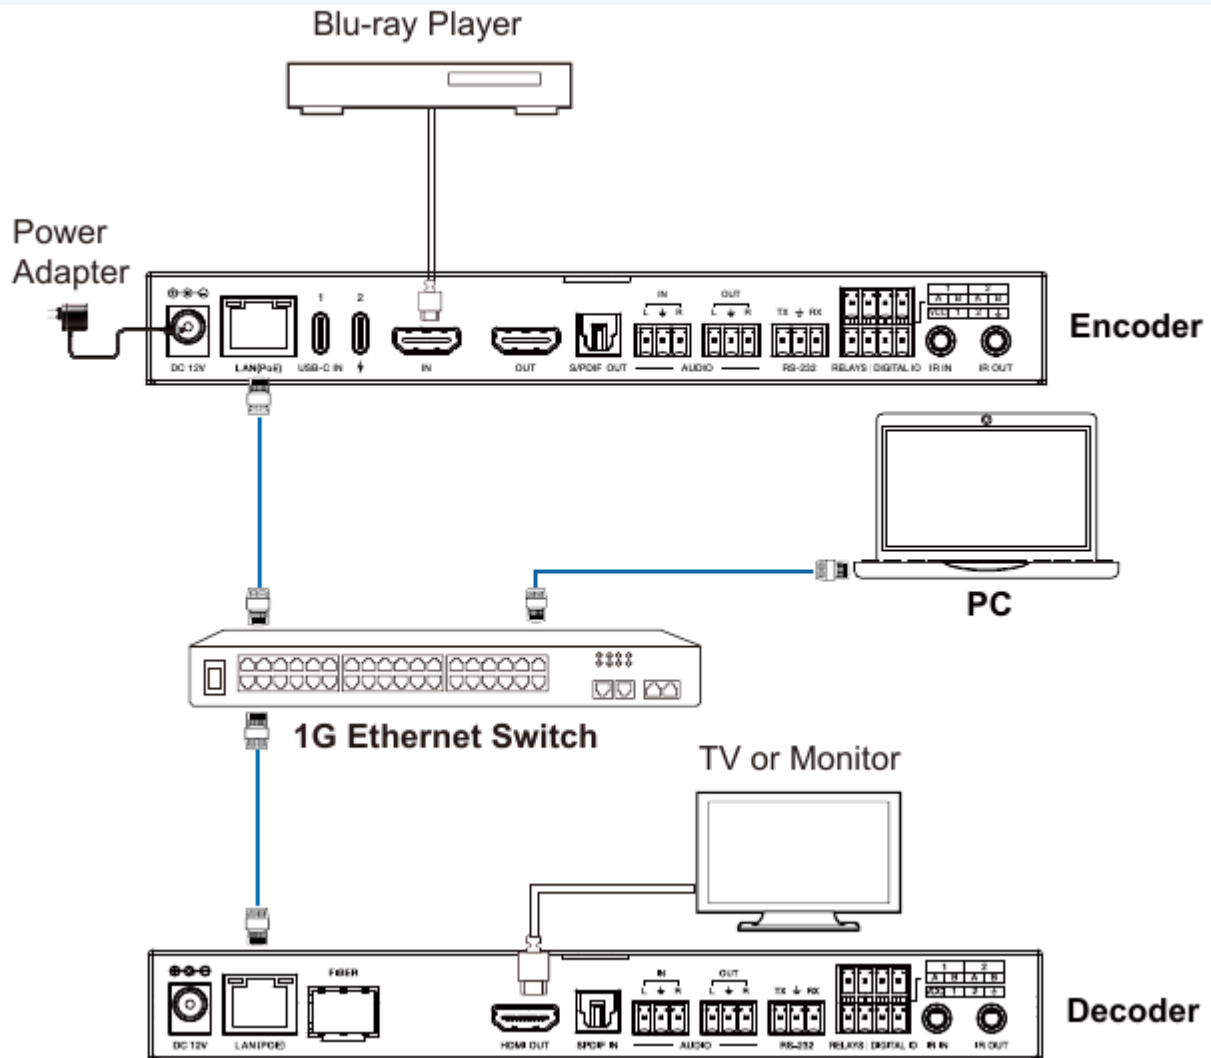

Step 2: Press and hold the UP button on the front panel of Encoder/Decoder for 5 seconds to check the current IP Address.

Step 3: Set the PC's IP address to the same network segment with IP address of the Encoder/Decoder found in step 2.

Step 4: Input the IP address of the Encoder/Decoder into the web browser on PC to access the Web GUI of Encoder/Decoder.

System

(1) **Version Information:** The software version of the device.



The build string shown here is the unit's own firmware-reported version tag — genuine device data that reads the same regardless of the enclosure branding.

(2) **Update Firmware:** The firmware update interface.

System

Video Wall

Network

Functions

802.1X

Sub-Streaming

▸ Version Information:

▾ Update Firmware:

Choose File

No file chosen

Upload

Warning: Stop any service by disconnecting from the peer before you proceed to upgrade firmware.

▸ Update Image:

▸ Utilities:

▸ Statistics:

(3) **Update Image:** The standby and logo image upload interface.

SystemVideo WallNetworkFunctionsBD2.1XSub-Streaming

Version Information:

Update Firmware:

Update Image:

Upload Standby Image:

Choose FileNo file chosenUpload

Upload Logo Image:

Choose FileNo file chosenUpload

Utilities:

(4) **Utilities:** This interface allows users to restore to factory default settings, reboot device, set EDID mode, console API command.

SystemVideo WallNetworkFunctions802.1XSub-Streaming

Version Information:

Update Firmware:

Update Image:

Utilities:

Commands

Factory DefaultReboot

Reset EDID to Default Value:

☒ Default HDMI EDID

☐ Default DVI EDID

☐ Default VGA EDID

Apply

Console API Command

Apply

Output

(5) **Statistics:** The status information of the device.

The statistics interface of Encoder is as follows.

SystemVideo WallNetworkFunctions802.1XSub-Streaming

▶ Version Information:

▶ Update Firmware:

▶ Update Image:

▶ Utilities:

▼ Statistics:

State Machine

State: s_attaching

Network

ID (Host Name): 6CDFFB0003D8

IP Address: 169.254.50.80

Subnet Mask: 255.255.0.0

Default Gateway: 169.254.0.254

MAC Address: 6CDFFB0003D8

Casting Mode: Unicast Mode

Link Status: on

Link Mode: 1G

Video

EDID Used:

00 ff ff ff | ff ff ff 00 | 20 83 00 73 | 00 00 00 01 |
24 1f 01 03 | 80 33 1d 78 | ee ee 95 a3 | 54 4c 99 26 |
0f 50 54 a5 | 4b 00 71 4f | 81 80 d1 c0 | 01 01 01 01 |
01 01 01 01 | 01 01 02 3a | 80 18 71 38 | 2d 40 58 2c |
45 00 fe 1f | 11 00 00 1e | 01 1d 00 72 | 51 d0 1e 20 |
6e 28 55 00 | 0c 8e 31 00 | 00 18 00 00 | 00 fc 00 49 |
50 20 45 78 | 74 65 6e 64 | 65 72 0a 20 | 00 00 00 fd |
00 38 4c 1e | 53 11 00 0a | 20 20 20 20 | 20 20 01 46 |
02 03 1f f1 | 4c 90 02 03 | 01 07 16 12 | 04 1f 13 14 |
05 23 09 07 | 07 65 03 0c | 00 10 00 83 | 01 00 00 02 |
3e 88 38 73 | 38 3d 48 58 | 3e 45 88 5e | 1f 33 88 88 |

The statistics interface of Decoder is as follows.

SystemVideo WallNetworkFunctions802.1XSub-Streaming

▶ Version Information:

▶ Update Firmware:

▶ Update Image:

▶ Utilities:

▼ Statistics:

State Machine

State: s_idle

Network

ID (Host Name): 6CDFFB0003D3

IP Address: 169.254.20.2

Subnet Mask: 255.255.0.0

Default Gateway: 169.254.1.1

MAC Address: 6CDFFB0003D3

Casting Mode: Unicast Mode

Link Status: on

Link Mode: 1G

Video

Local Video Output:

attached=y

HDCP Ver=Unknown

Checksum: ok

Extension: 1

CEA Ext (block 1): y

CEA Ext Checksum: ok

HDMI 2.0: n

HDMI 1.x: y

-- -- -- --

Video Wall

(1) **Basic Setup:** This interface allows users to perform basic settings, such as set the bezel, gap, size and position of the video wall, as well as select the stretch type, rotate and flip.

SystemVideo WallNetworkFunctions802.1XSub-Streaming

Basic Setup:


Bezel and Gap Compensation

OW:

OH:

VW:

VH:

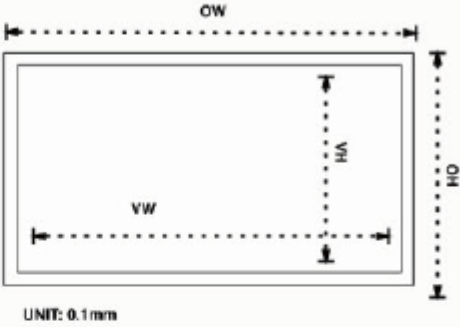


Wall Size and Position Layout

Vertical Monitor Count:

Horizontal Monitor Count:

Row Position:

Column Position:

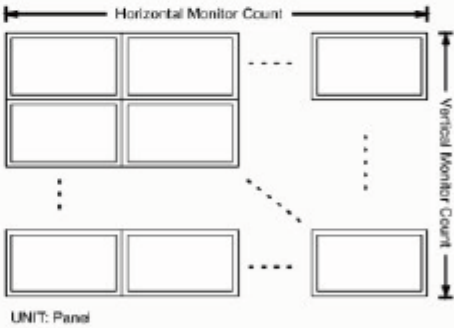

Preferences

Stretch Type:

Rotate and Flip:

Apply To: "This" device connected by your browser

Apply

☐ Show OSD

(2) **Advanced Setup:** This interface allows users to perform advanced settings for the video wall.

SystemVideo WallNetworkFunctions802.1XSub-Streaming

Basic Setup:

Advanced Setup:

Step 1: Choose Control Target

0

☐ Show OSD

Step 2: Control Options

Reset to Basic Setup:

Reset

Stretch Type:

Fit In

Apply

Clockwise Rotate:

0

Apply

Screen Layout (Row x Column):

1

x

1

Apply

Row Position:

0

Apply

Column Position:

0

Apply

bluknot · BLU-JP1G-HC-ENC · Bronx Systems India Private Limited

27 / 40

Network

This interface allows users to set the IP and select the casting mode (multicast/unicast). Three IP modes are supported:

- **Auto IP:** The IP address is set automatically. After the device is powered off and restarted, a new IP address is randomly assigned.
- **DHCP:** The IP address of the device is assigned by the router.
- **Static:** Static IP address.

SystemVideo WallNetworkFunctions802.1XSub-Streaming

IP Setup

IP Mode:

Auto IP

DHCP

Static

IP Address:

169.254.50.80

Subnet Mask:

255.255.0.0

Default Gateway:

169.254.0.254

Apply

Casting Mode

Multicast

Unicast

☒ Auto select USB operation mode per casting mode (recommended)

Apply

Functions

This interface allows users to select the modes of video, USB, serial port and audio.

System	Video Wall	Network	Functions	802.1X	Sub-Streaming
--------	------------	---------	-----------	--------	---------------

Video over IP

☒ Enable Video over IP

Maximum Bit Rate:

Apply

USB over IP

☒ Enable USB over IP

Operation Mode:

☒ Auto select mode (Recommended, choose per network casting mode)
☐ Active on link (Unicast network's default mode)
☐ Active per request (Multicast network's default mode)

Compatibility Mode:

☐ Mouse not responding well (Check when USB mouse responding is slow and queer)
☒ K/M over IP (Uncheck when mouse/keyboard/touch panel not working as expected)

Apply

Serial over IP

☒ Enable Serial over IP

Operation Mode:

☐ Type 1 (Need extra control instruction. For advanced usage.)
☒ Type 2 (Recommended. Dumb redirection.)
☐ Type 1 guest mode
☐ Type 2 guest mode

Baudrate Setting for Type 2:

Baudrate:
 Data bits:
 Parity:
 Stop bits:

Apply

Audio over IP

☒ Enable Audio Over IP

☒ Enable Audio Return Path

☐ Enable Local Audio Extraction (Extract input audio to analog)

ADDON Configuration:

ADDON Type:

☐ Enable ADDON Bridge Mode (ASPEED <--> ADDON)

Apply

802.1X

This interface allows users to enable 802.1X authentication and validate server certificate.

SystemVideo WallNetworkFunctions802.1XSub-Streaming

Configuration

☐ Enable 802.1X Authentication

☐ Validate Server Certificate

CA certificate:

Choose FileNo file chosen

Upload

Server Certificate Start Time:(YYYY-MM-DD-hh:mm:ss)


Authentication Method:

- Select -

Apply

Sub-Streaming

This interface allows users to preview the video of the signal source in real time.

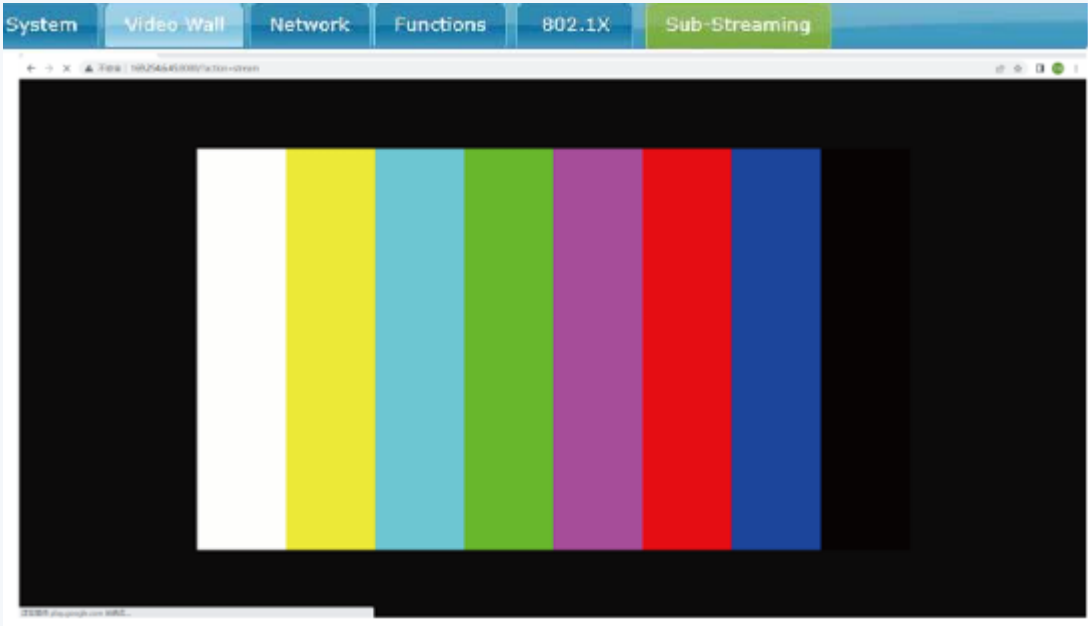


Sub-Streaming preview tab – showing the connected source (color-bar test pattern used here for illustration)

10 MJPEG Substream Operation Introduction

10.1 MJPEG Substream Preview/Configuration via Web Page

The product supports playing MJPEG Substream on computer through the corresponding software such as **VLC media player**, simultaneously you can access the Web page to configure the MJPEG Substream. Follow the steps below to preview and configure the MJPEG Substream.



- Step 1:** Connect the Encoder, Decoder and PC to the same Switch, then connect an HDMI source device, HDMI display device and power supply.
- Step 2:** Install a bonjour protocol checking tool (such as zeroconfServiceBrowser) on PC to find the IP address of the Encoder/Decoder. Take zeroconfServiceBrowser as an example. After opening the software, you can select “Workgroup Manager” in Services of Browser, select the Host name in Service-Instances, and find the IP address in the Address item of Instance-Info.

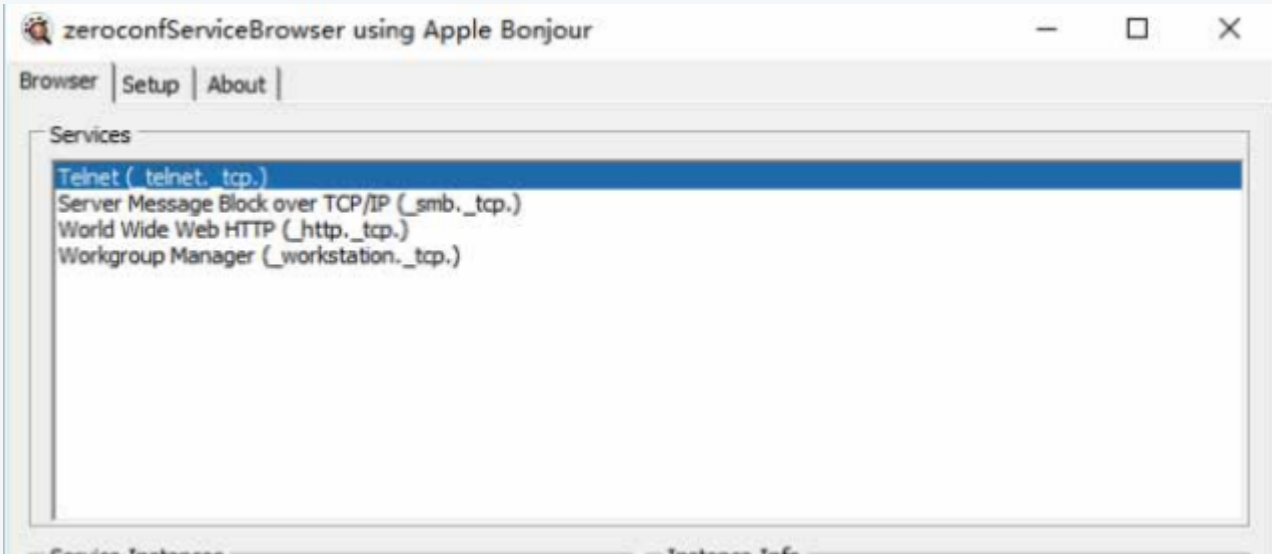

zeroconfServiceBrowser – Host name, IP address and port of the Encoder/Decoder


Notes: (1) The window in the lower left corner displays the Host names of all devices in the current network. (2) The window in the lower right corner displays the Host name, IP address and Port number of the device. (3) The Host name of Encoder starts with AST-ENC; the Host name of Decoder starts with AST-DEC.

Step 3: Set the PC's IP address to the same network segment with IP address of the Encoder/Decoder found in step 2.

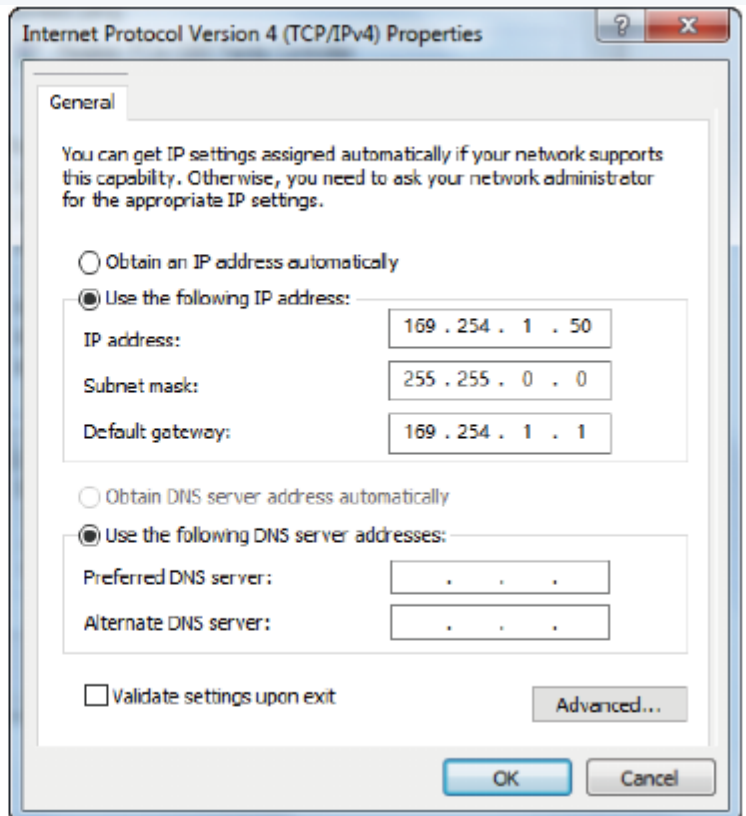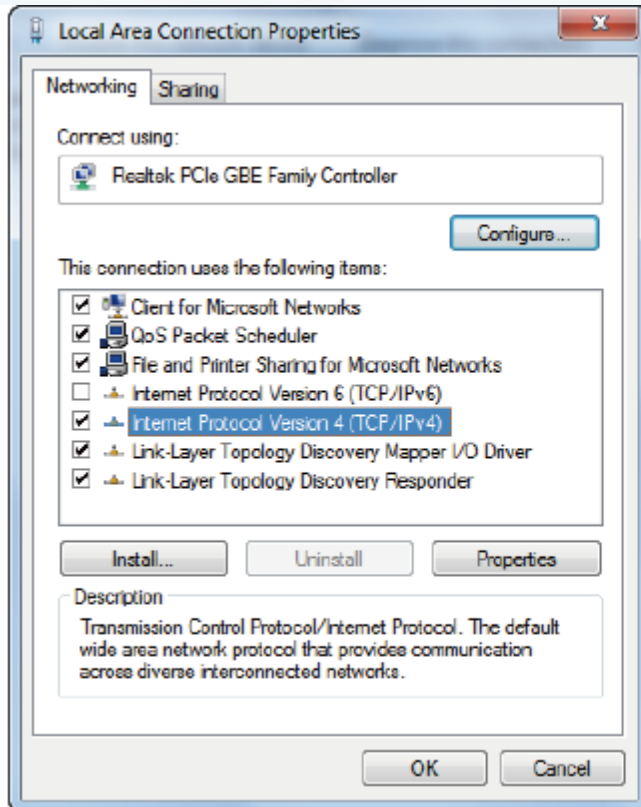

Windows Local Area Connection & TCP/IPv4 Properties

Step 4: According to the IP address of the Encoder/Decoder found through the bonjour protocol checking tool, input “http://IP:PORT/?action=stream” into the web browser on PC. The MJPEG Substream will be displayed with the default resolution, as shown below.

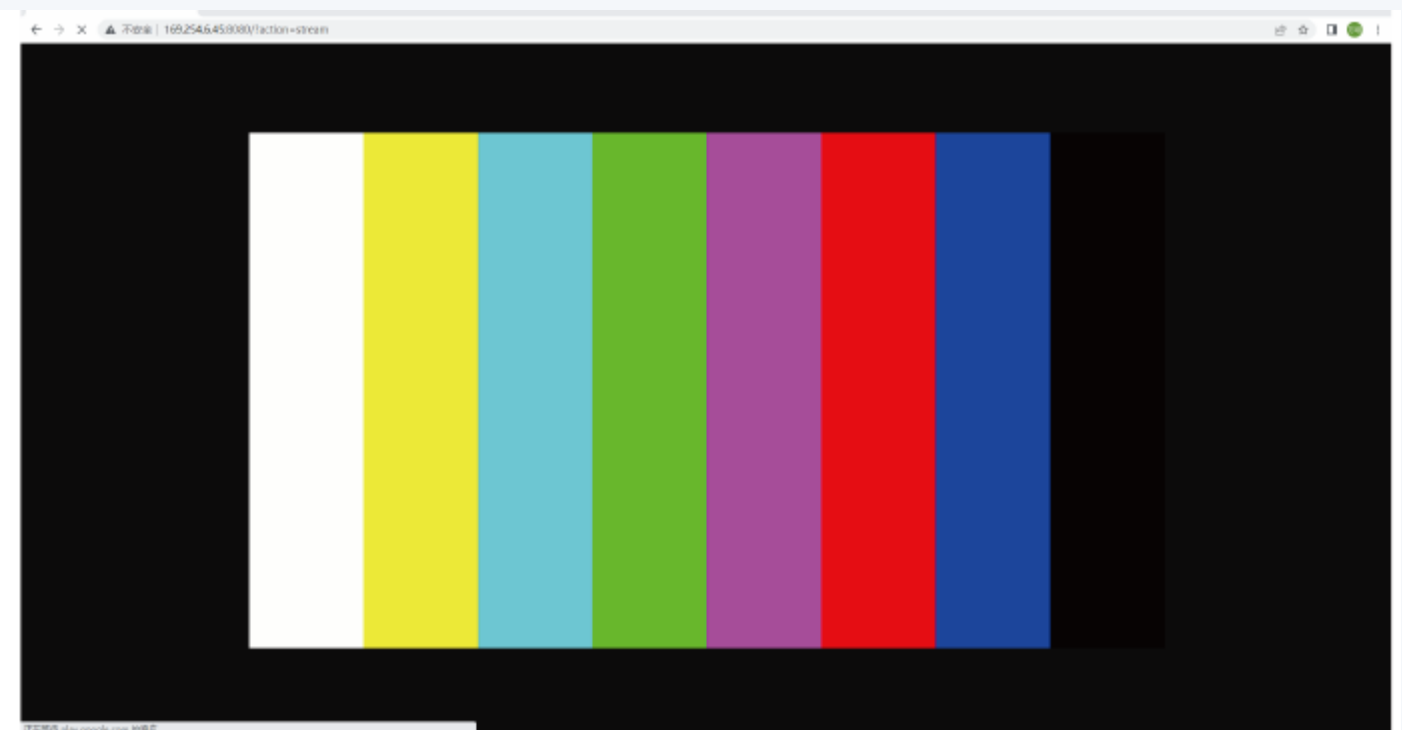


MJPEG Substream – default resolution

Step 5: Change the resolution of the obtained Encoder/Decoder IP address in the following format.

`http://IP:PORT/?action=stream&w=x&h=x&fps=x&bw=x&as=x&mq=x`

- **WIDTH:** [Optional] image width. In pixels. 'x' means no change. Default is 640.
- **HEIGHT:** [Optional] image height. In pixels. 'x' means no change. Default is 360.
- **FRAMERATE:** [Optional] frame rate of sub-stream. Unit: fps (frame per second). 'x' means no change. Default is 30.
- **BW:** [Optional] maximum bandwidth of sub-stream traffic. Unit: Kbps (Kbits per second). 'x' means no change. Default is 8000 (8Mbps).
- **AS:** [Optional] aspect ratio configuration. 'x' means no change. Default is 0. 0: extend to what “WIDTH” and “HEIGHT” configured. 1: [A1 only] keep original aspect ratio and place in the center of output (letterboxing or pillarboxing).
- **MINQ:** [Optional] minimum image quality number. Range: 10, 20, ..., 90, 100, higher setting means better image quality. 'x' means no change. Default value is 10. Limit driver auto bandwidth control's minimum quality number. If quality lower than MINQ value, the driver will drop frame by returning 0 size file.


After changing, input the new Encoder/Decoder IP address into the web browser on PC, the MJPEG Substream will be displayed with the desired resolution, as shown below.

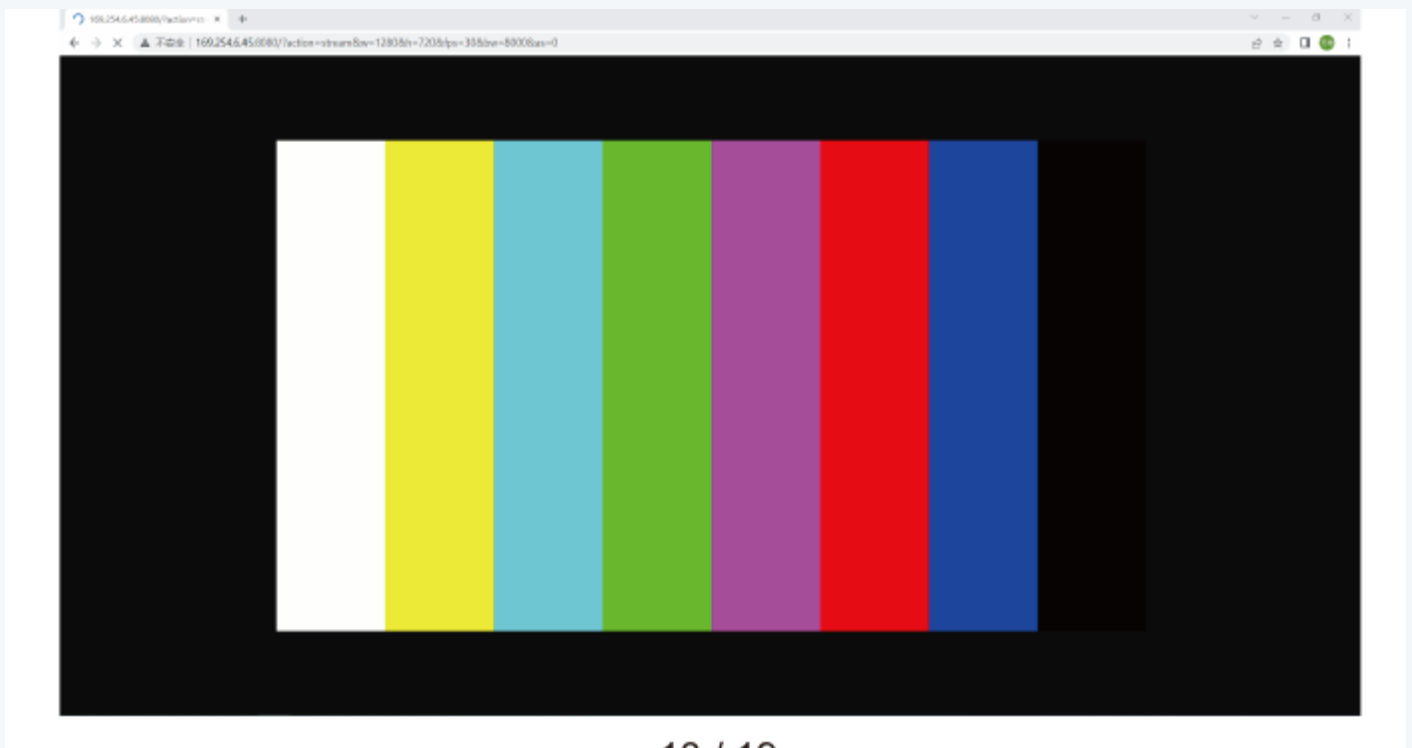


MJPEG Substream – custom resolution, e.g. w=1280&h=720&fps=30&bw=8000&as=0


10.2 VLC Media Player Instruction

Firstly, perform steps 1~3 as described in Chapter 10.1, then open the VLC media player on PC.




Click “Media > Open Network Stream”. After clicking the option, the following page will appear.

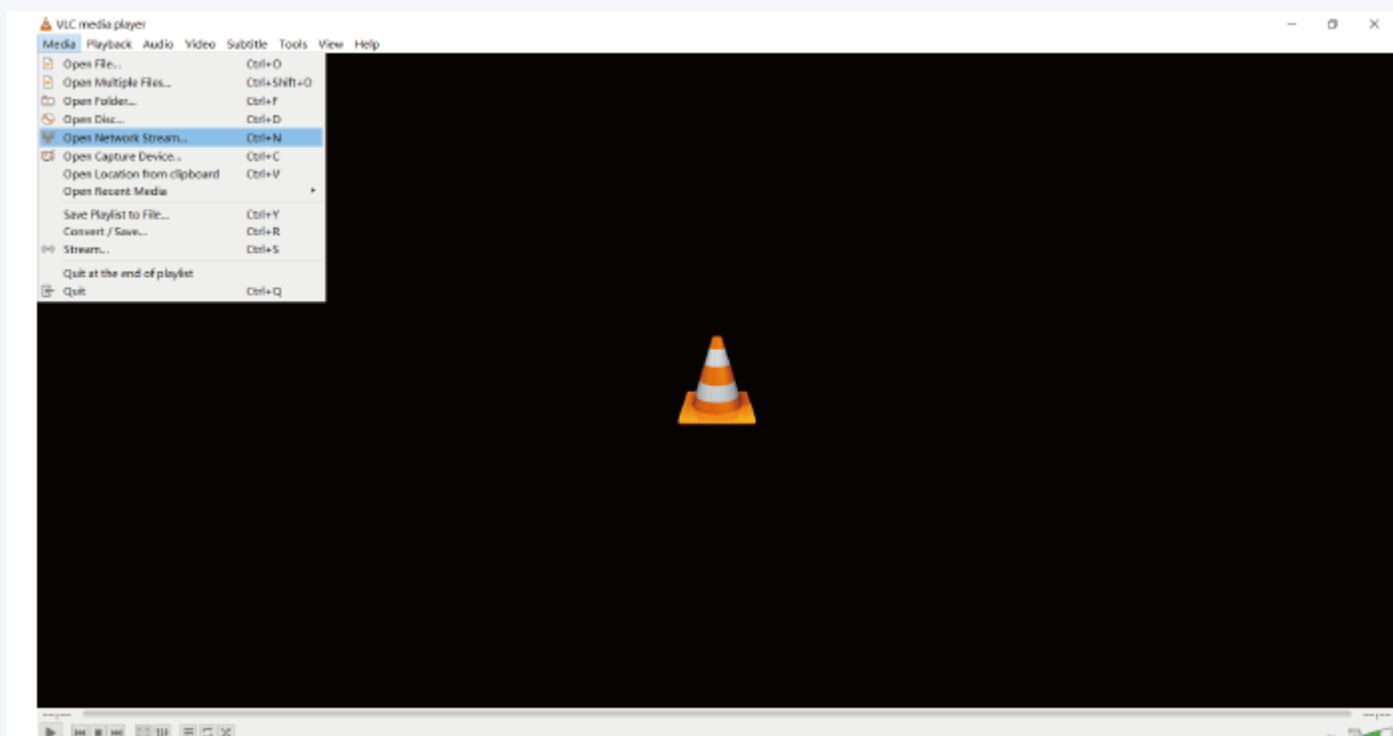


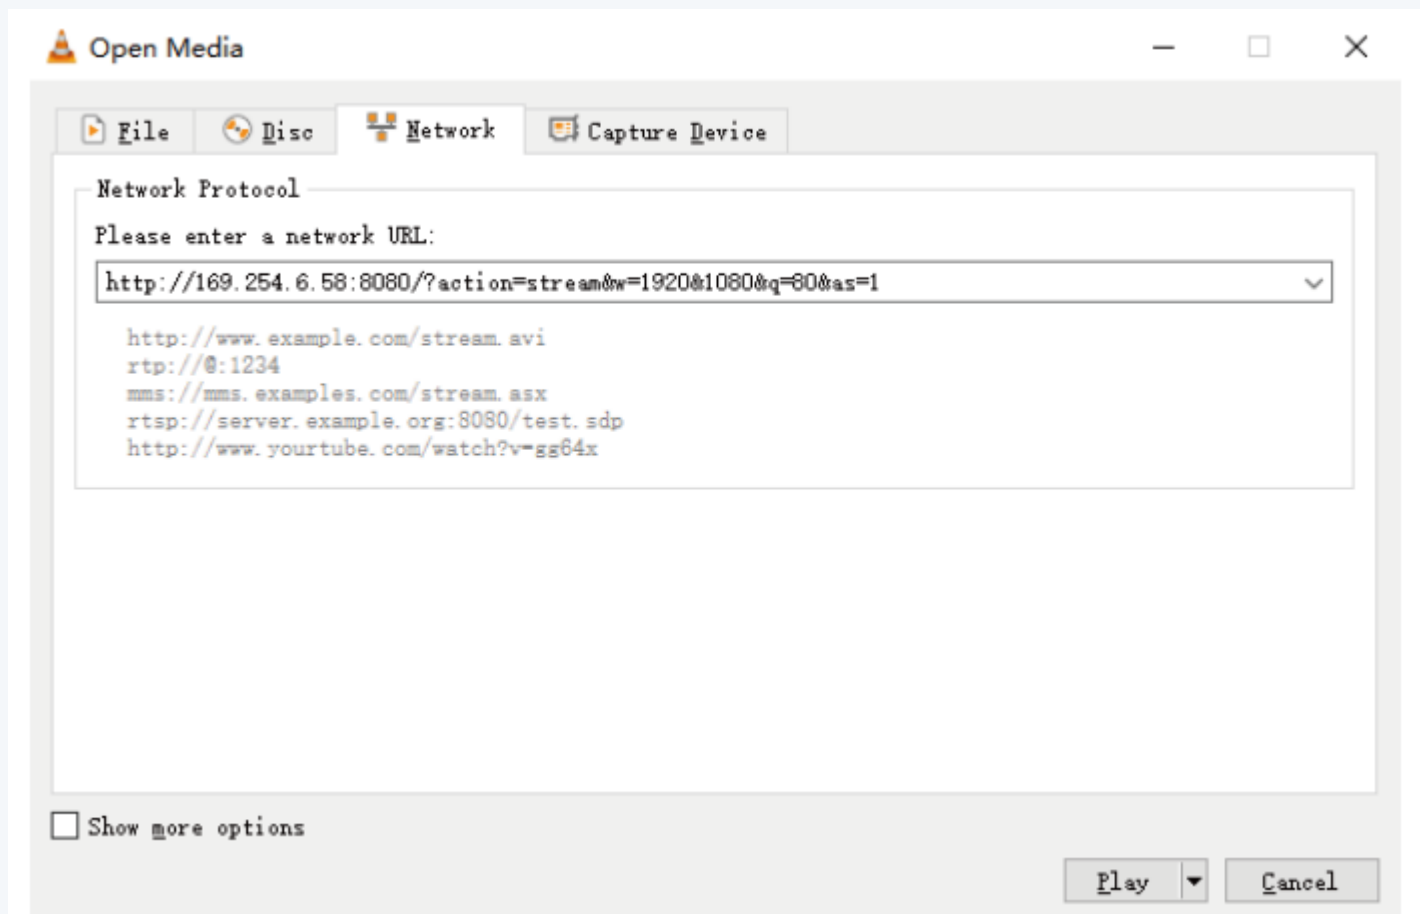


Enter the MJPEG Substream network URL, then click "Play"

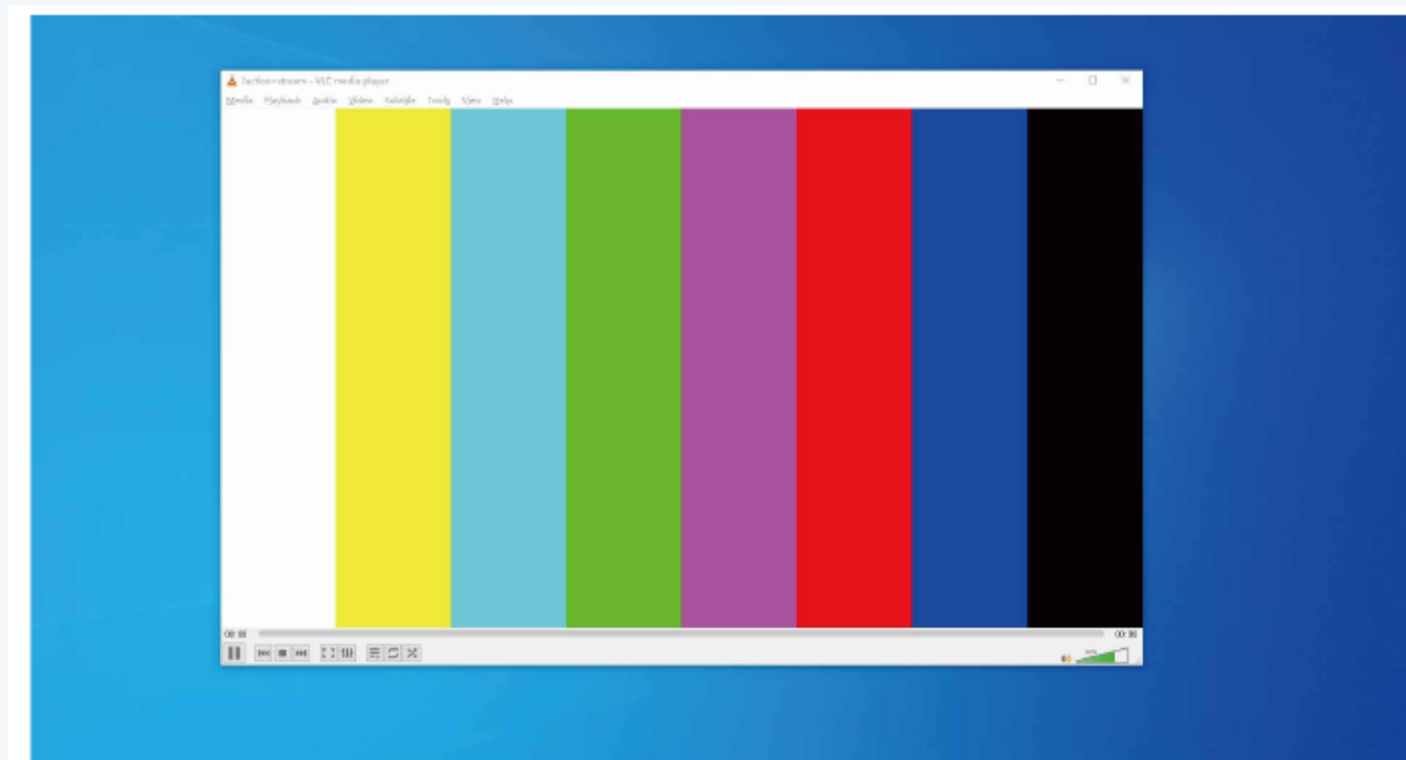

Choose “Tools > Codec information”, a pop-up window will display and show Stream information, as shown below.

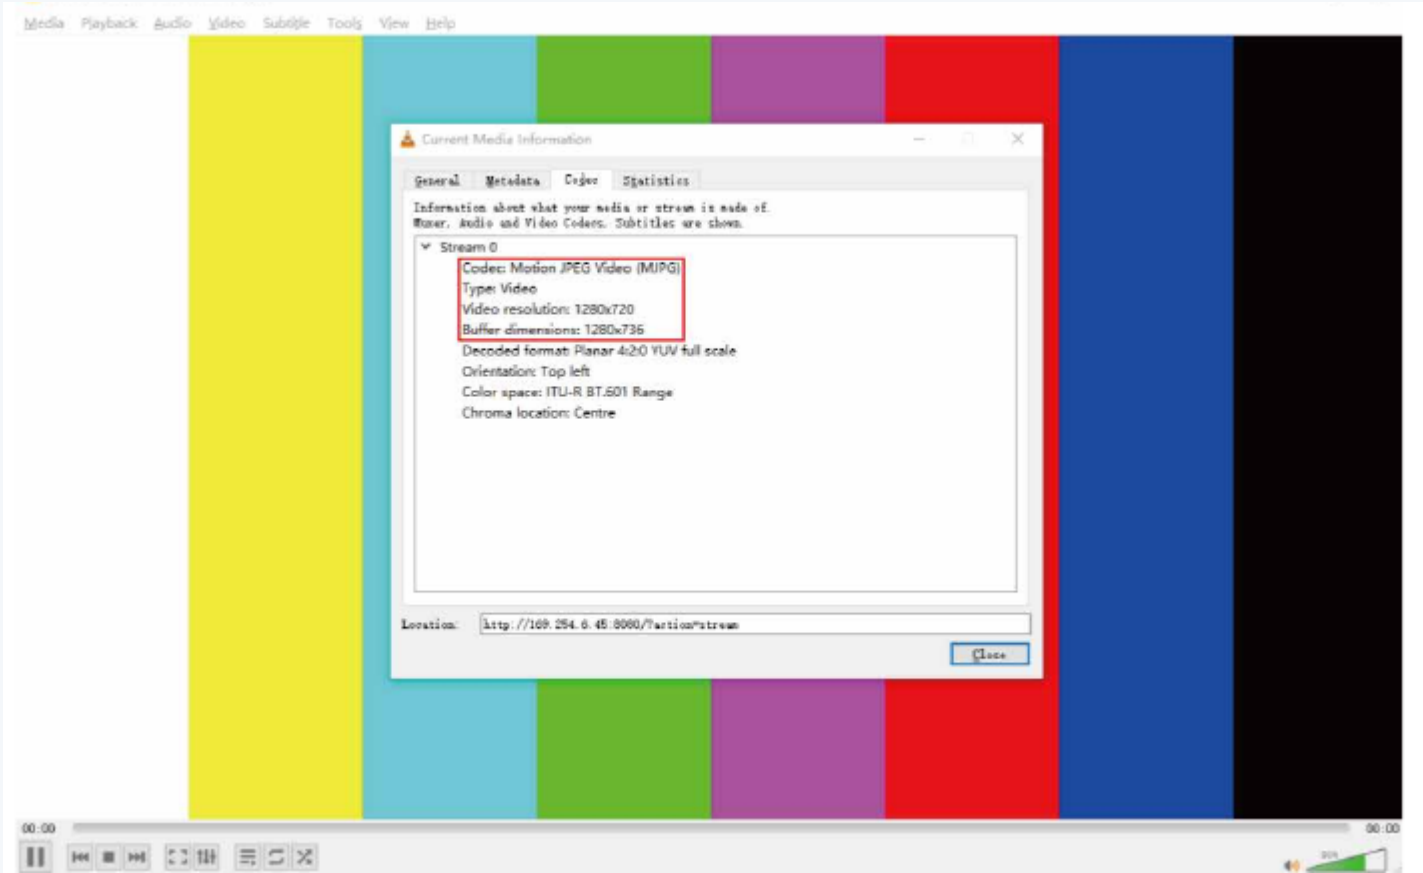

Choose “Tools > Codec information > Statistics” to check current Bitrate. Please see the following picture.

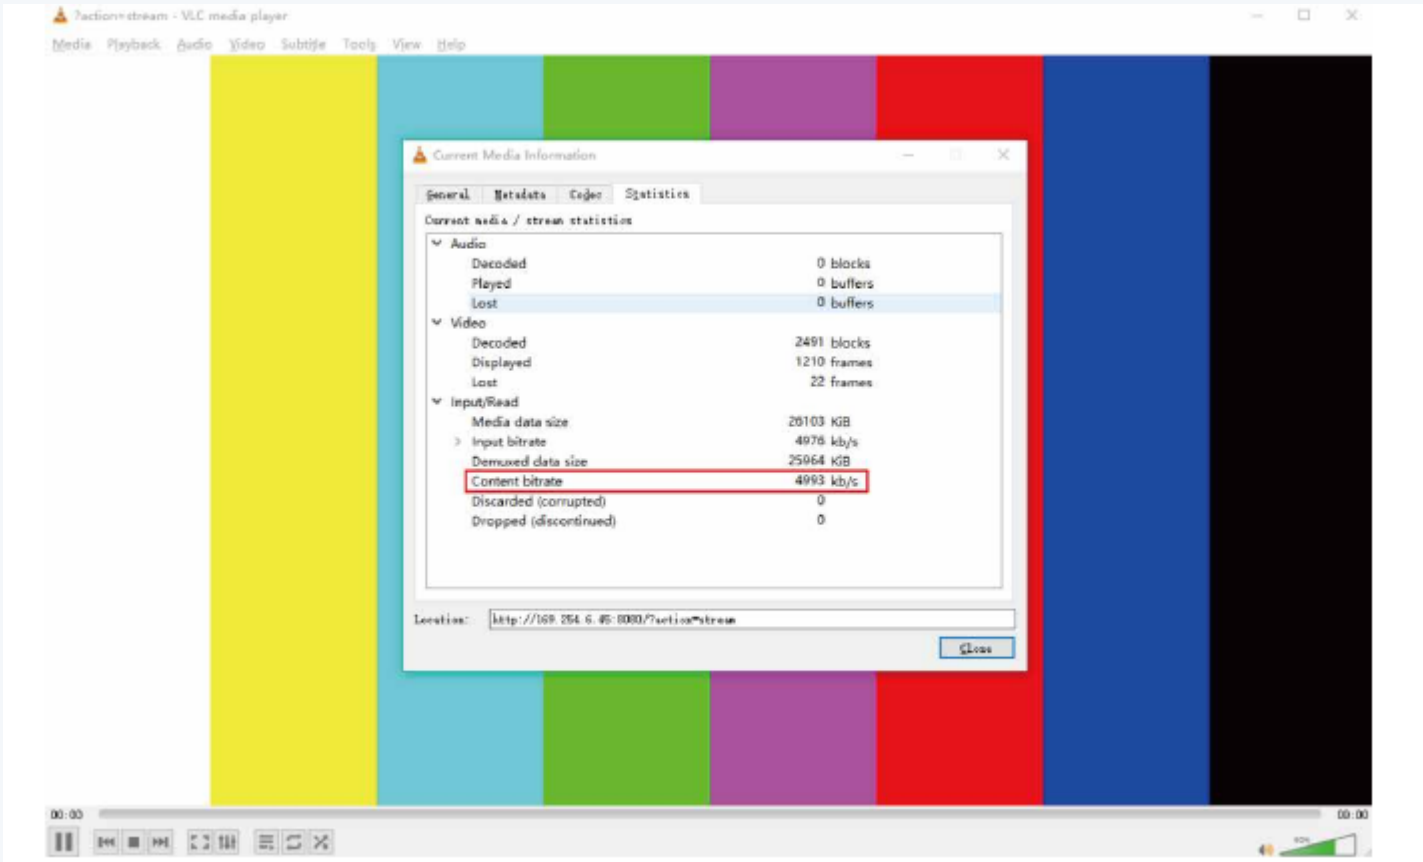

The Bitrate is floating up and down when you check it. This is a normal phenomenon.

11 Switch Model

A network Switch used to set up the system should support the following features.

- Type of layer 3/managed network Switch.
- Gigabit bandwidth.
- 8KB jumbo frame capability.
- IGMP snooping.


RECOMMENDED SWITCH MODELS	
MANUFACTURER	MODEL NUMBER
CISCO	CISCO SG500
CISCO	CATALYST series
HUAWEI	S5720S-28X-PWR-LI-AC
ZyXEL	GS2210
LUXUL	AMS-4424P

12 4K over IP System Control

This product can be controlled by Controller Box or third-party controller. For details of 4K over IP system control, please refer to the user manual of “Video over IP Controller”.

13 Application Example

Multiple sources encoded, distributed over 1G Ethernet through a Controller Box, decoded to a video wall and individual displays.

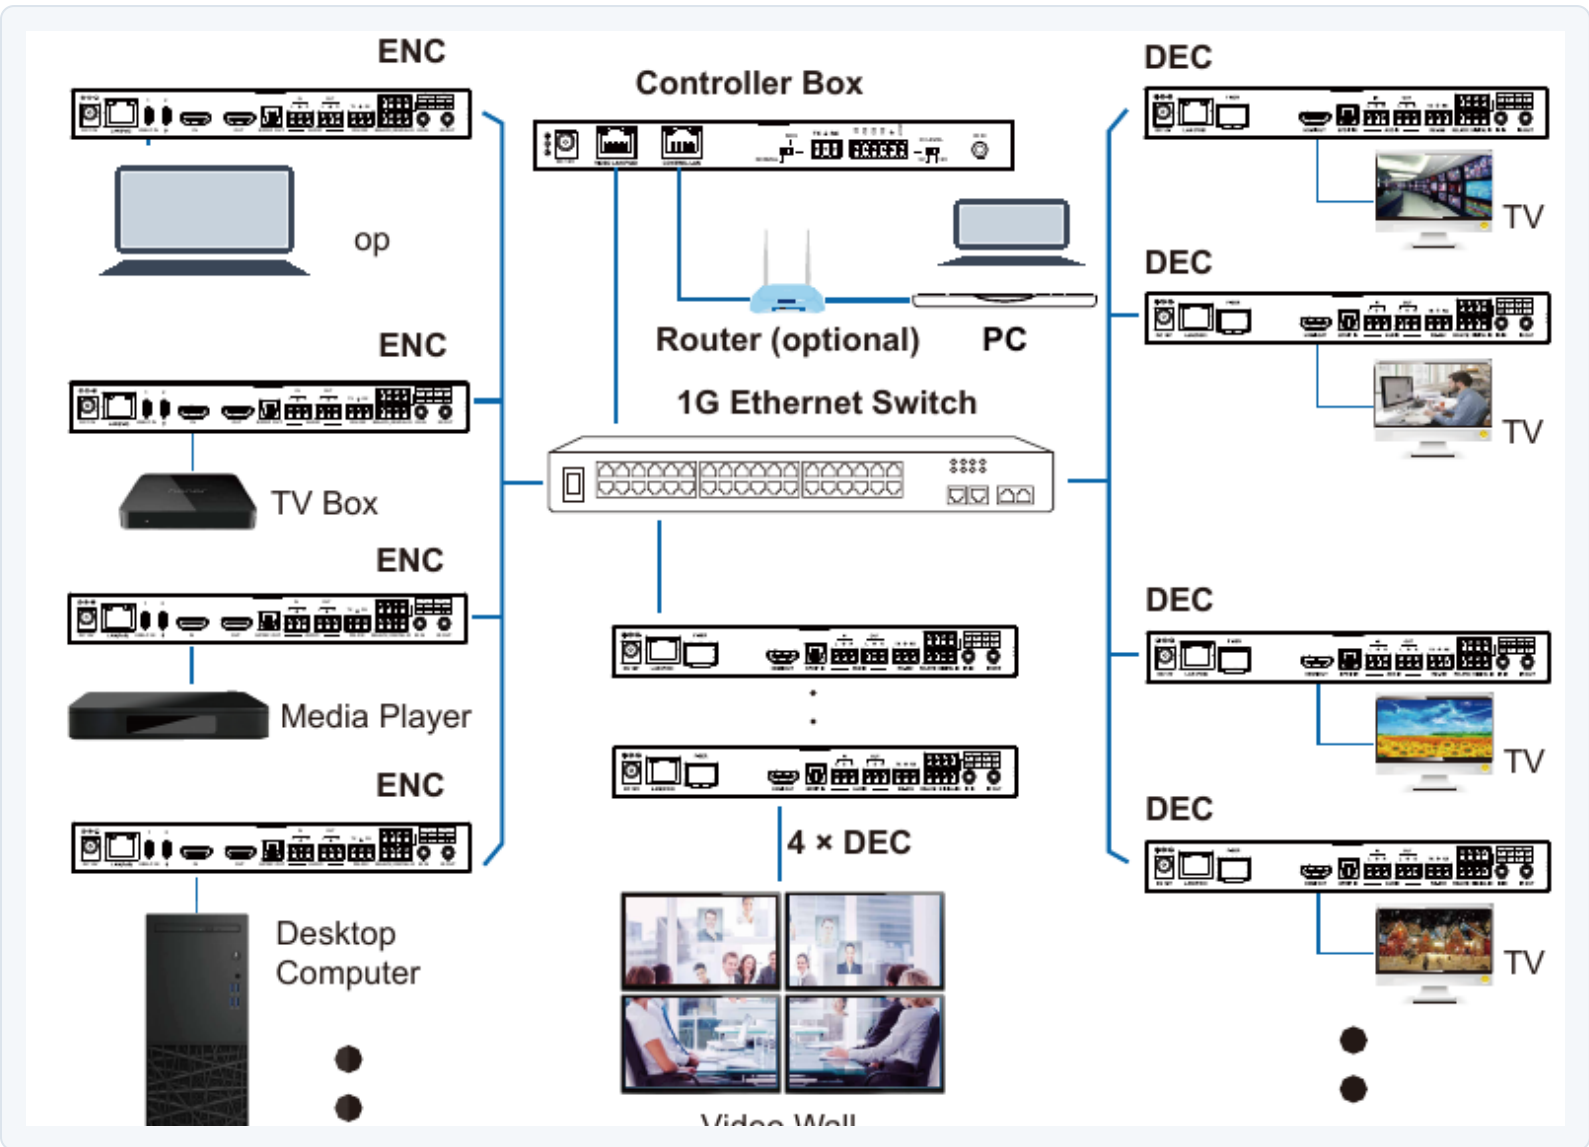

Notes:

(1) The Controller has two LAN ports, one is Video LAN and the other one is Control LAN. The purpose of designing Controller with two LAN ports is to isolate audio/video (AV) network from control network. So to make AV network as an independent network which can not be accessed from control network directly, it's for bringing network security and avoiding AV network traffic flowing into the network in which the controls and managements are for the IP system.

The strongly recommended system setup is connecting Video LAN and Encoders/Decoders in a network Switch, connecting Control LAN and PC in another network Switch. The controls from Control LAN can be achieved by Web GUI/Telnet or SSH login/API commands, all these controls can be bridged by the Controller and applied onto Video LAN. The two LANs are isolated.

For simple usage, you can only connect all Encoders/Decoders and Video LAN and PC RJ-45 port into a single network, and let the Control LAN port not-connected (floating), as Video LAN also supports Web GUI/Telnet or SSH login/API commands controls, this seems “convenient” for general use scenarios, but this is only suggested for system in which there is no network isolation requirement or network traffic non-sensitive.

Only Control LAN connected while Video LAN floating, this is not allowed.

(2) For the default IP mode of Control LAN port of the Controller Box is DHCP, the PC also needs to be set to “Obtain an IP address automatically” mode, and an optional DHCP server (e.g. network router) is recommended in the system.

(3) If there is no DHCP server in the system, 192.168.6.100 will be used as the IP address of Control LAN port. You need to set the IP address of the PC to be in the same network segment. For example, set PC's IP address as 192.168.6.88.

(4) You can access the Web GUI by inputting URL “http://controller.local” or the Control LAN port IP address 192.168.6.100 (in case of no optional router) on your computer's browser.

(5) No need to care about settings of Video LAN port of the Controller Box, as they are managed by Controller automatically (Default).

(6) When the Network Switch does not support PoE, the Encoder, Decoder and Controller Box should be powered by DC power adapter.

The terms HDMI and HDMI High-Definition Multimedia interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Bluknot is a registered trademark of Bronx Systems India Private Limited. www.bronx.co.in · sales@bronx.co.in · admin@bronx.co.in

bluKnot